Vantage Downlight

5YR IP20 ON-SITE WARRANTY 2 YEARS

Part of the Downlights product category

Model	Vantage CCT 1 Downlight
Code	AVAN1/1
Application	Ancillary, Commercial, Education, Healthcare, Hospitality, Retail

GENERAL INFORMATION

Input	220-240V
Wattage	6.5W - 8W
Operating Temp	-20°C - 40°C
Lumens Delivered	650lm - 880lm (4000K)
lm/W	105lm/W
CCT	3000K-4000K-6500K
UGR	24
Beam Angle	80

MATERIAL INFORMATION

Main Material	Alunimum
Diffuser Material	Polycarbonate
Product Weight without Packaging	0.18 kg
Colour / Finish	White
Diameter	82 mm
Height	54 mm


TECHNICAL INFORMATION

Class Protection	2
Light Source	LED
SDCM (Initial Macadam)	6
CRI	80
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Power Factor	0.70
L70 @ 25°C	L70 100,000

PRODUCT FEATURES

- Performance downlight suitable for commercial and education applications
- Deep cut-off angle for glare control and comfort
- UGR<19 (unified glare rating) compliant luminaire assisting to eliminate glare for visual comfort
- CCT selectable between 3000K, 4000K and 6500K and power selectable; offering a choice of 2 outputs, in one luminaire
- Downlight design allows installation into existing hole cut-outs from 68mm,100mm, 150mm and 200mm



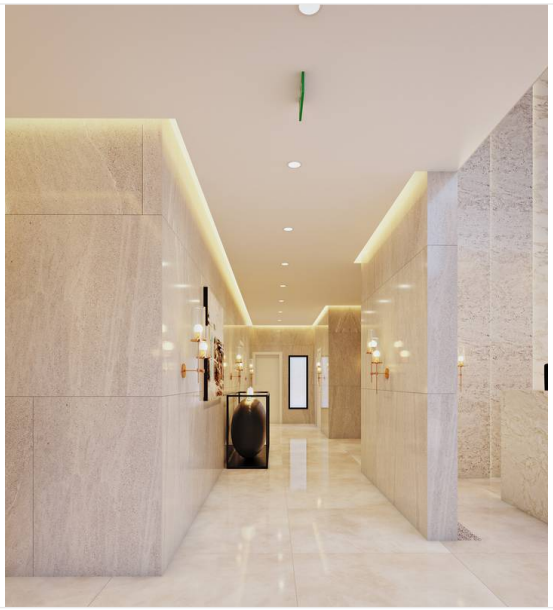

Vantage Downlight

Part of the Downlights product category

Model	Vantage CCT 1 Downlight
Code	AVAN1/1
Application	Ancillary, Commercial, Education, Healthcare, Hospitality, Retail

