



# Vantage Downlight

Part of the Downlights product category



<b>Model</b>	Vantage CCT 3 Downlight
<b>Code</b>	AVAN3/1
<b>Application</b>	Ancillary, Commercial, Education, Healthcare, Hospitality, Retail

## GENERAL INFORMATION

<b>Input</b>	220-240V
<b>Wattage</b>	15W - 18W
<b>Operating Temp</b>	-20°C - 40°C
<b>Lumens Delivered</b>	1900lm - 2300lm (4000K)
<b>lm/W</b>	125lm/W
<b>CCT</b>	3000K-4000K-6500K
<b>UGR</b>	24
<b>Beam Angle</b>	80

## MATERIAL INFORMATION


<b>Main Material</b>	Aluminum
<b>Diffuser Material</b>	Polycarbonate
<b>Product Weight without Packaging</b>	0.32 kg
<b>Colour / Finish</b>	White
<b>Diameter</b>	172 mm
<b>Height</b>	98 mm

## TECHNICAL INFORMATION

<b>Class Protection</b>	2
<b>Light Source</b>	LED
<b>SDCM (Initial Macadam)</b>	6
<b>CRI</b>	80
<b>Internal / External</b>	Internal
<b>Surface / Recessed / Suspended</b>	Recessed
<b>Power Factor</b>	0.70
<b>L70 @ 25°C</b>	L70 100,000

## PRODUCT FEATURES

- Performance downlight suitable for commercial and education applications
- Deep cut-off angle for glare control and comfort
- UGR<19 (unified glare rating) compliant luminaire assisting to eliminate glare for visual comfort
- CCT selectable between 3000K, 4000K and 6500K and power selectable; offering a choice of 2 outputs, in one luminaire
- Downlight design allows installation into existing hole cut-outs from 68mm,100mm, 150mm and 200mm

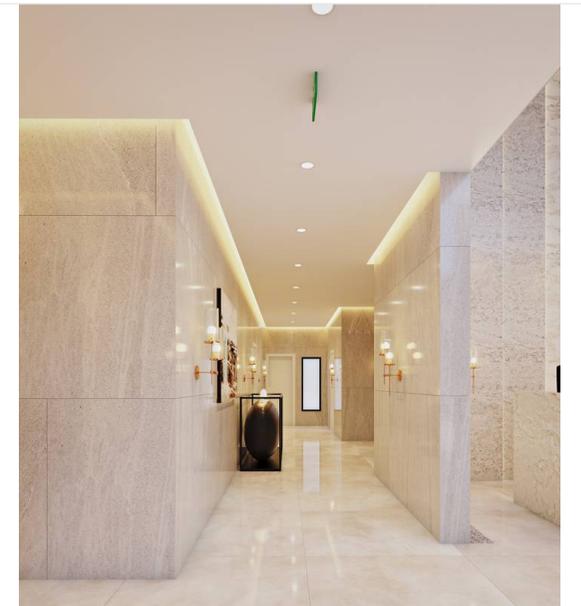



# Vantage Downlight



Part of the Downlights product category

**Model** Vantage CCT 3 Downlight  
**Code** AVAN3/1  
**Application** Ancillary, Commercial, Education, Healthcare, Hospitality, Retail

