



# Vantage Downlight

Part of the Downlights product category



**Model** Vantage CCT 4 Downlight  
**Code** AVANTLED4  
**Application** Ancillary, Commercial, Education, Healthcare, Hospitality, Retail

## GENERAL INFORMATION

Input	220-240V
Wattage	27W
Operating Temp	-25°C - 40°C
Lumens Delivered	3200lm (4000K)
lm/W	121lm/W (4000K)
CCT	3000/4000/6000K
UGR	24
Beam Angle	75

## MATERIAL INFORMATION


Main Material	Aluminium
Product Weight without	0.493 kg
Packaging	
Colour / Finish	White
Diameter	230 mm
Height	128 mm

## TECHNICAL INFORMATION

Class Protection	2
Light Source	LED
SDCM (Initial Macadam)	6
CRI	80
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Power Factor	0.9
L70 @ 25°C	L70 B50 60,000h

## PRODUCT FEATURES

- CCT selectable LED performance downlight suitable for commercial and education applications
- Deep cut-off angle for glare control and comfort
- One product provides 3000K, 4000K and 6500K colour temperature options
- Downlight design allows installation into existing hole cut-outs from 68mm, 100mm, 150mm and 200mm
- Anti-Ligature kit available for installation in secure environments such as healthcare and educational facilities

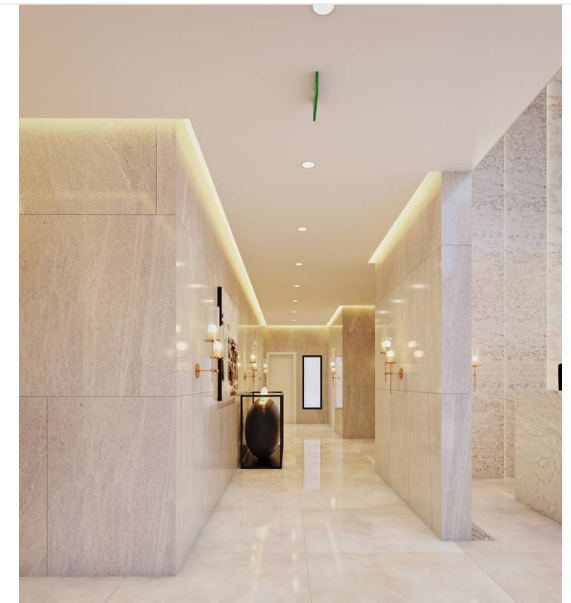



# Vantage Downlight



Part of the Downlights product category

<b>Model</b>	Vantage CCT 4 Downlight
<b>Code</b>	AVANTLED4
<b>Application</b>	Ancillary, Commercial, Education, Healthcare, Hospitality, Retail

