



Vasco



Part of the Commercial Linear product category

Model	Vasco EVO CCT Multi Wattage 1200mm Self-Test Emergency Black
Code	AVAS4/1/B/SM3
Application	Commercial, Education, Healthcare, Hospitality, Retail

GENERAL INFORMATION

Input	220-240V
Wattage	14W - 32W
Operating Temp	5°C to 45°C
Lumens Delivered	1500lm - 3400lm (4000K) / 2000lm - 4600lm (4000K w/ AVAS4/1/UGR)
lm/W	105lm/W (150lm/W w/ AVAS4/1/UGR)
CCT	3000K/4000K
UGR	23
Beam Angle	110

MATERIAL INFORMATION

Main Material	Aluminium
Diffuser Material	Polycarbonate
Product Weight without Packaging	2.9 kg
Colour / Finish	Black
Height	75 mm

TECHNICAL INFORMATION


Class Protection	1
Light Source	LED
SDCM (Initial Macadam)	3
CRI	80
Internal / External	Internal
Surface / Recessed / Suspended	Surface, Suspended
Power Factor	0.9
L70 @ 25°C	L70 54,000h

PRODUCT FEATURES

- Aluminium bi-directional suspended or surface linear suitable for education, commercial and retail applications
- Bi-directional light output as standard with 30% upward light and 70% downward light ratio (downward only option can be selected if required, please note light output changes in downward only mode)
- High efficiency upto 150lm/W (only when fitted with UGR diffuser - AVAS*/1/UGR)
- Opal diffuser (provided as standard) provides optimal light uniformity
- CCT selectable between 3000K and 4000K and power selectable; offering a choice of 2 outputs, in one luminaire

ACCESSORIES

AVAS/1/1200/B	Vasco EVO Infill 1200mm Black
AVAS4/1/UGR	Vasco EVO UGR19 Reflector 1200mm
AVASLED/B/SK	Vasco CCT Suspension Kit Black
AVASLED/90/B	Vasco CCT 90° Corner Connector Black
AVAS/WM/1	Vasco Wall Mounting Kit
AVAS/P3/2/B	Vasco Three Circuit Track Adaptor Black

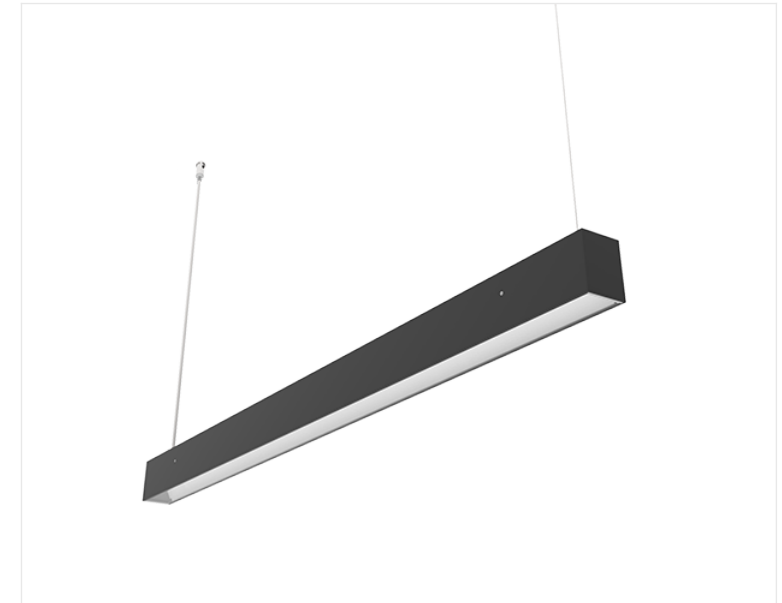





Vasco



Part of the Commercial Linear product category

Model	Vasco EVO CCT Multi Wattage 1200mm Self-Test Emergency Black
Code	AVAS4/1/B/SM3
Application	Commercial, Education, Healthcare, Hospitality, Retail

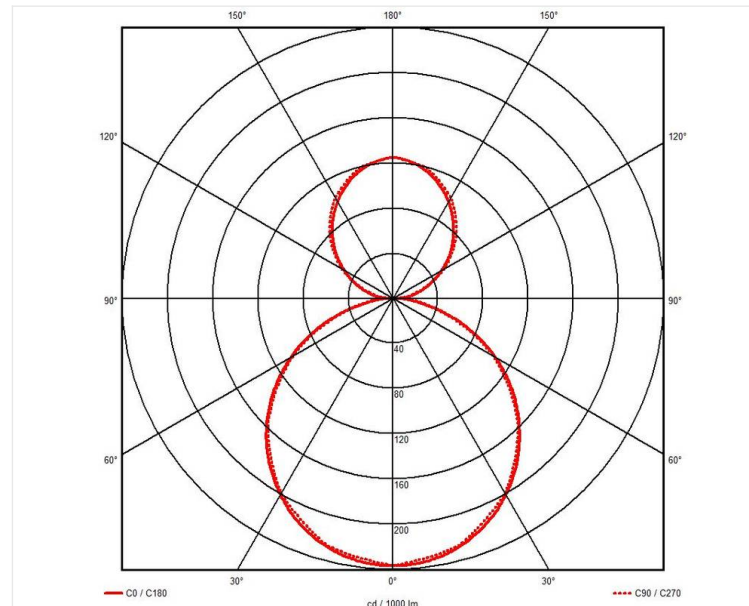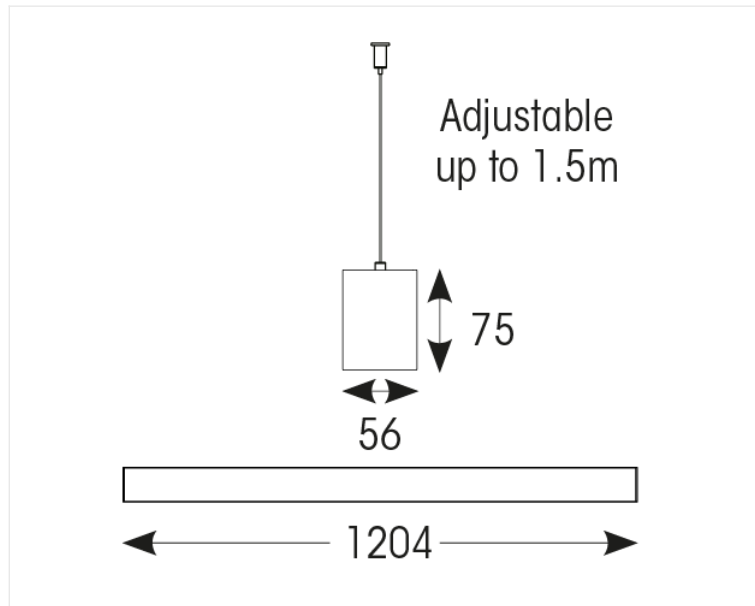

Varied Mounting Options

Flexible installation with surface, suspension, track and wall mounting options available




Interchangeable Reflector

Specially designed optics allows to achieve UGR19 low glare rating. Simply unclip the end cap and replace the diffuser. *Optal diffuser supplied as standard (UGR23)



PIR Option

Available as an end cap for standalone fittings enabling flexible



Linkable

Using Linkable Connector Accessory AVAS4/LC

