



# Vasco



Part of the Commercial Linear product category

|                    |                                                        |
|--------------------|--------------------------------------------------------|
| <b>Model</b>       | Vasco EVO CCT Multi Wattage 1200mm DALI White          |
| <b>Code</b>        | AVAS4/1/W/DD3                                          |
| <b>Application</b> | Commercial, Education, Healthcare, Hospitality, Retail |

## GENERAL INFORMATION

|                         |                                                                  |
|-------------------------|------------------------------------------------------------------|
| <b>Input</b>            | 220-240V                                                         |
| <b>Wattage</b>          | 14W - 32W                                                        |
| <b>Operating Temp</b>   | -20°C to 45°C                                                    |
| <b>Lumens Delivered</b> | 1500lm - 3400lm (4000K) / 2000lm - 4600lm (4000K w/ AVAS4/1/UGR) |
| <b>lm/W</b>             | 105lm/W (150lm/W w/ AVAS4/1/UGR)                                 |
| <b>CCT</b>              | 3000K/4000K                                                      |
| <b>UGR</b>              | 23                                                               |
| <b>Beam Angle</b>       | 110                                                              |

## MATERIAL INFORMATION

|                                         |               |
|-----------------------------------------|---------------|
| <b>Main Material</b>                    | Aluminium     |
| <b>Diffuser Material</b>                | Polycarbonate |
| <b>Product Weight without Packaging</b> | 2.77 kg       |
| <b>Colour / Finish</b>                  | White         |
| <b>Height</b>                           | 75 mm         |

## TECHNICAL INFORMATION

|                                       |                    |
|---------------------------------------|--------------------|
| <b>Class Protection</b>               | 1                  |
| <b>Light Source</b>                   | LED                |
| <b>SDCM (Initial Macadam)</b>         | 3                  |
| <b>CRI</b>                            | 80                 |
| <b>Internal / External</b>            | Internal           |
| <b>Surface / Recessed / Suspended</b> | Surface, Suspended |
| <b>Power Factor</b>                   | 0.9                |
| <b>L70 @ 25°C</b>                     | L70 54,000h        |

## PRODUCT FEATURES

- Aluminium bi-directional suspended or surface linear suitable for education, commercial and retail applications
- Bi-directional light output as standard with 30% upward light and 70% downward light ratio (downward only option can be selected if required, please note light output changes in downward only mode)
- High efficiency upto 150lm/W (only when fitted with UGR diffuser - AVAS\*/1/UGR)
- Opal diffuser (provided as standard) provides optimal light uniformity
- CCT selectable between 3000K and 4000K and power selectable; offering a choice of 2 outputs, in one luminaire

## ACCESSORIES

|               |                                         |
|---------------|-----------------------------------------|
| AVAS/1/1200/W | Vasco EVO Infill 1200mm White           |
| AVAS4/1/UGR   | Vasco EVO UGR19 Reflector 1200mm        |
| AVASLED/W/SK  | Vasco CCT Suspension Kit White          |
| AVASLED/90/W  | Vasco CCT 90° Corner Connector White    |
| AVAS/WM/1     | Vasco Wall Mounting Kit                 |
| AVAS/P3/2/W   | Vasco Three Circuit Track Adaptor White |







# Vasco



Part of the Commercial Linear product category

|                    |                                                        |
|--------------------|--------------------------------------------------------|
| <b>Model</b>       | Vasco EVO CCT Multi Wattage 1200mm DALI White          |
| <b>Code</b>        | AVAS4/1/W/DD3                                          |
| <b>Application</b> | Commercial, Education, Healthcare, Hospitality, Retail |

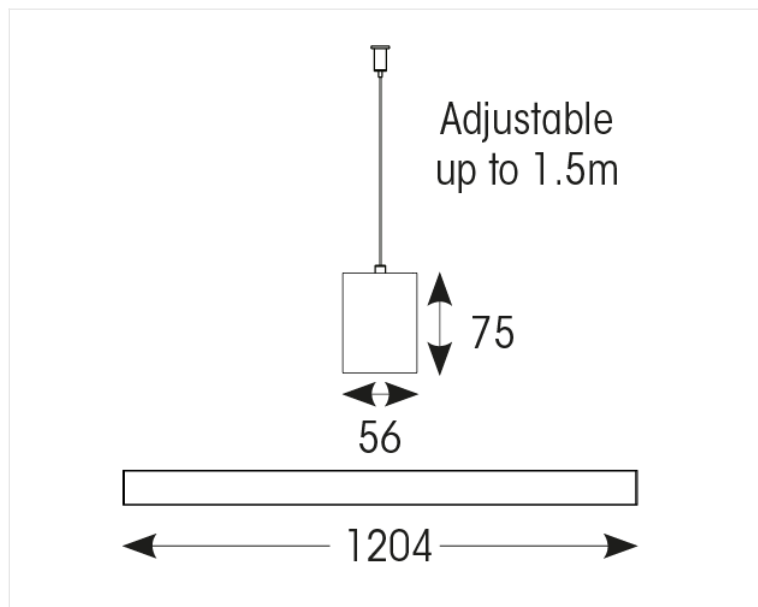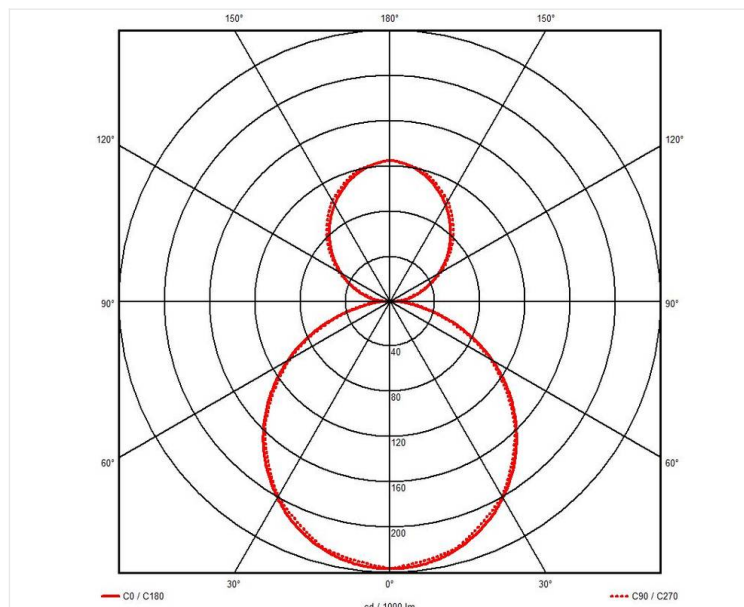

**Interchangeable Reflector**  
Specially designed optics allows to achieve UGR19 low glare rating. Simply unclip the end cap and replace the diffuser.  
\*Optal diffuser supplied as standard (UGR23)



**PIR Option**  
Available as an end cap for standalone fittings enabling flexible

