



# Vasco



Part of the Commercial Linear product category

**Model** Vasco EVO CCT Multi Wattage 1500mm Self-Test Emergency Black

**Code** AVAS5/1/B/SM3

**Application** Commercial, Education, Healthcare, Hospitality, Retail

### GENERAL INFORMATION

<b>Input</b>	220-240V
<b>Wattage</b>	25W - 40W
<b>Operating Temp</b>	5°C to 45°C
<b>Lumens Delivered</b>	2500lm - 4500lm (4000K) / 3300lm - 6400lm (4000K w/ AVAS5/1/UGR)
<b>lm/W</b>	105lm/W (150lm/W w/ AVAS5/1/UGR)
<b>CCT</b>	3000K/4000K
<b>UGR</b>	23
<b>Beam Angle</b>	110

### MATERIAL INFORMATION

<b>Main Material</b>	Aluminium
<b>Diffuser Material</b>	Polycarbonate
<b>Product Weight without Packaging</b>	3.52 kg
<b>Colour / Finish</b>	Black
<b>Height</b>	75 mm

### TECHNICAL INFORMATION


<b>Class Protection</b>	1
<b>Light Source</b>	LED
<b>SDCM (Initial Macadam)</b>	3
<b>CRI</b>	80
<b>Internal / External</b>	Internal
<b>Surface / Recessed / Suspended</b>	Surface, Suspended
<b>Power Factor</b>	0.9
<b>L70 @ 25°C</b>	L70 54,000h

### PRODUCT FEATURES

- Aluminium bi-directional suspended or surface linear suitable for education, commercial and retail applications
- Bi-directional light output as standard with 30% upward light and 70% downward light ratio (downward only option can be selected if required, please note light output changes in downward only mode)
- High efficiency upto 150lm/W (only when fitted with UGR diffuser - AVAS\*/1/UGR)
- Opal diffuser (provided as standard) provides optimal light uniformity
- CCT selectable between 3000K and 4000K and power selectable; offering a choice of 2 outputs, in one luminaire

### ACCESSORIES

AVAS/1/1200/B	Vasco EVO Infill 1200mm Black
AVAS5/1/UGR	Vasco EVO UGR19 Reflector 1500mm
AVASLED/B/SK	Vasco CCT Suspension Kit Black
AVASLED/90/B	Vasco CCT 90° Corner Connector Black
AVAS/WM/1	Vasco Wall Mounting Kit
AVAS/P3/2/B	Vasco Three Circuit Track Adaptor Black

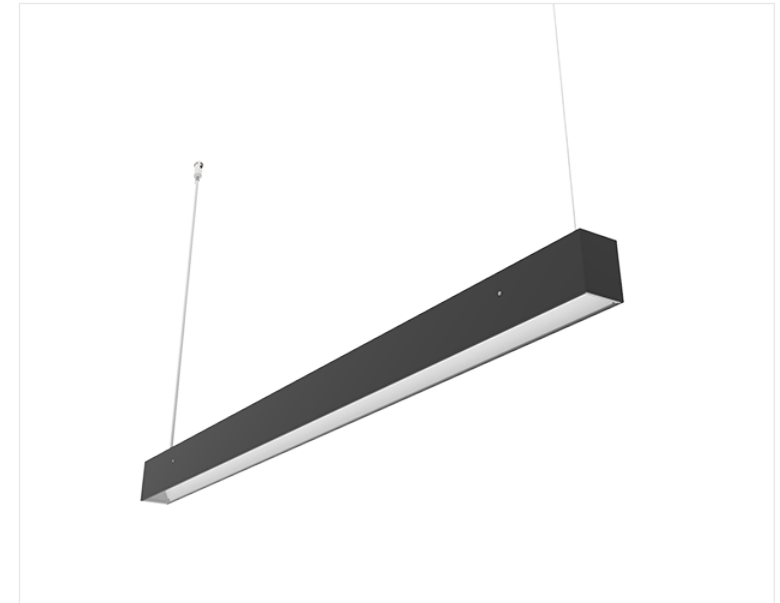



# Vasco





Part of the Commercial Linear product category

**Model** Vasco EVO CCT Multi Wattage 1500mm Self-Test Emergency Black

**Code** AVAS5/1/B/SM3


**Application** Commercial, Education, Healthcare, Hospitality, Retail

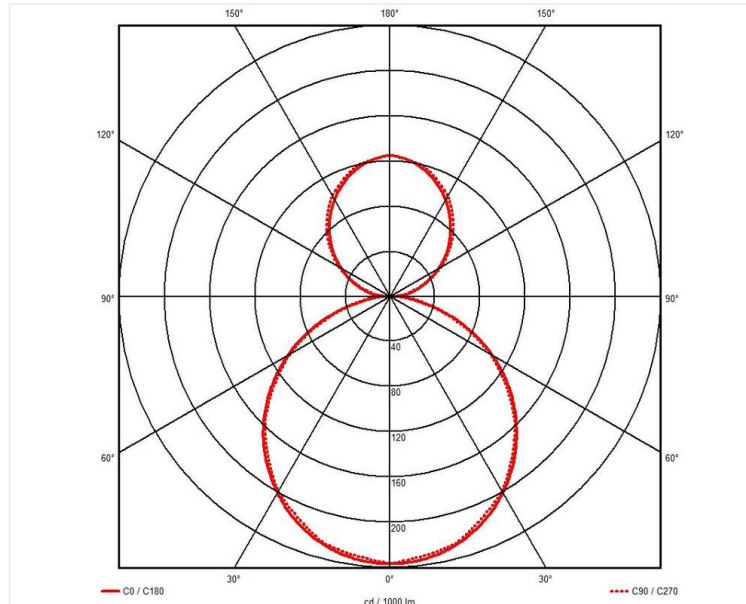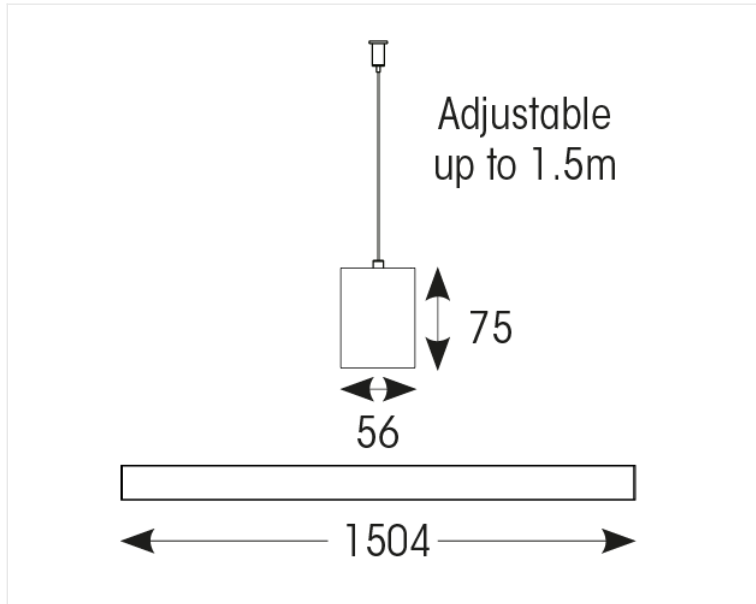


**Varied Mounting Options**  
Flexible installation with surface, suspension, track and wall mounting options available



**Interchangeable Reflector**  
Specially designed optics allows to achieve UGR19 low glare rating. Simply unclip the end cap and replace the diffuser.  
\*Optal diffuser supplied as standard (UGR23)



**PIR Option**  
Available as an end cap for standalone fittings enabling flexible



**Linkable**  
Using Linkable Connector Accessory AVAS5/LC

