



|               |  |
|---------------|--|
| Category      | Commercial Linear                                      |
| Application   | Commercial, Education, Healthcare, Hospitality, Retail |
| Specification | Architectural  |

# Vasco EVO

Vasco EVO CCT Multi Wattage 1500mm Self-Test Emergency Silver

Code: AVAS5/1/S/SM3




## Varied Mounting Options

Flexible installation with surface, suspension, track and wall mounting options available



## Interchangeable Reflector

Specially designed optics allows to achieve UGR19 low glare rating. Simply unclip the end cap and replace the diffuser. \*Opal diffuser supplied as standard (UGR23)



## PRODUCT FEATURES

- Aluminium bi-directional suspended or surface linear suitable for education, commercial and retail applications
- High efficiency upto 150lm/W (only when fitted with UGR diffuser - AVAS\*/1/UGR)
- CCT selectable between 3000K and 4000K and power selectable; offering a choice of 2 outputs, in one luminaire
- Pre-wired with 1.5 metre cable
- Bi-directional light output as standard with 30% upward light and 70% downward light ratio (downward only option can be selected if required, please note light output changes in downward only mode)
- Opal diffuser (provided as standard) provides optimal light uniformity
- PIR end cap accessory available
- Adjustable suspension points c/w suspension kit

## GENERAL INFORMATION

|                                  |  |
|----------------------------------|--|
| Wattage                          | 25W - 40W  |
| Lumens Delivered                 | 2500lm - 4500lm (4000K) / 3300lm - 6400lm (4000K w/ AVAS5/1/UGR) |
| Lm/W                             | 105lm/W (150lm/W w/ AVAS5/1/UGR)                                 |
| Beam Angle                       | 110  |
| CRI                              | 80   |
| CCT                              | 3000K/4000K  |
| Input                            | 220-240V   |
| Operating Temp                   | 50° to 45°   |
| SDCM                             | 3  |
| UGR                              | 23   |
| Product Weight without Packaging | 3.52 kg  |

## TECHNICAL INFORMATION

|                                |                    |
|--------------------------------|--------------------|
| Light Source                   | LED                |
| Colour / Finish                | Silver             |
| IP Rating                      | IP40               |
| IK Rating                      | IK06               |
| Class Protection               | 1                  |
| Internal / External            | Internal           |
| Surface / Recessed / Suspended | Surface, Suspended |
| Lumen Depreciation             | L80 100,000h       |
| Warranty (Years)               | 5                  |
| CE Mark                        | Yes                |
| Height                         | 75 mm              |





|                      |  |
|----------------------|--|
| <b>Category</b>      | Commercial Linear                                      |
| <b>Application</b>   | Commercial, Education, Healthcare, Hospitality, Retail |
| <b>Specification</b> | Architectural  |

# Vasco EVO

Vasco EVO CCT Multi Wattage 1500mm Self-Test Emergency Silver

**Code:** AVAS5/1/S/SM3

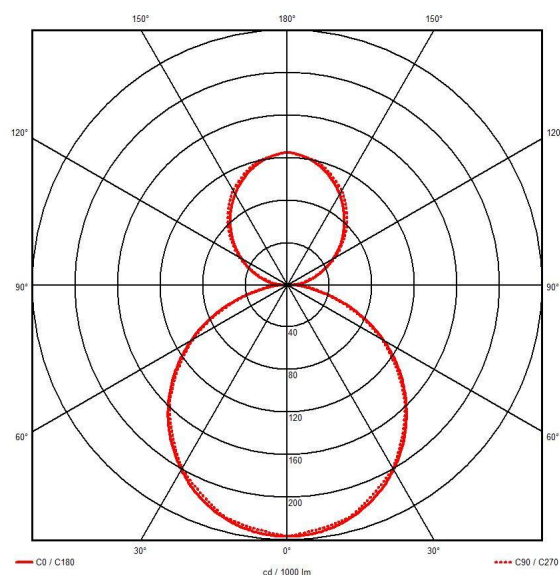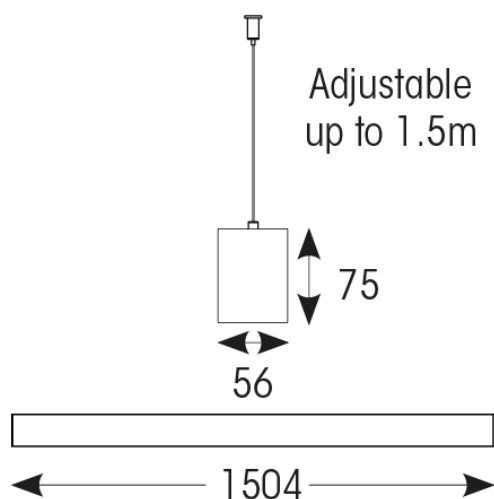

## ACCESSORIES

|               |  |
|---------------|--|
| AVAS/1/1200/S | Vasco EVO Infill 1200mm Silver           |
| AVAS5/1/UGR   | Vasco EVO UGR19 Reflector 1500mm         |
| AVASLED/SK    | Vasco CCT Suspension Kit Aluminium       |
| AVASLED/90    | Vasco CCT 90° Corner Connector Aluminium |
| AVAS/WM/1     | Vasco Wall Mounting Kit                  |
| AVAS/P3/2/W   | Vasco Three Circuit Track Adaptor White  |

