





<b>Category</b>	Commercial Linear
<b>Application</b>	Commercial, Education
<b>Specification</b>	Architectural

# Vasco

Vasco CCT Bi-directional Suspended Linear 1500mm Emergency Black

**Code:** AVASLED5/B/M3

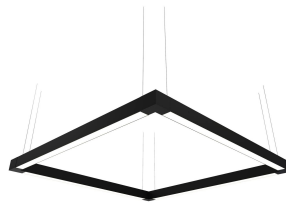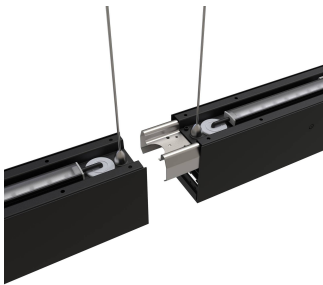

## PRODUCT FEATURES

- Aluminium bi-directional suspended or surface linear suitable for education, commercial and retail applications
- Supplied bi-directional light output as standard with 30% upward light and 70% downward light ratio (directional only option can be selected if required)
- Selectable CCT between 3000K, 4000K and 6000K output
- Adjustable suspension points c/w suspension kit
- Aluminium extruded construction with integral driver
- Opal diffuser provides optimal light uniformity
- Pre-wired with 1.5 metre cable
- 1-10V dimmable as standard

### GENERAL INFORMATION

<b>Wattage</b>	60W
<b>Lumens Delivered</b>	6300lm (4000K)
<b>Lm/W</b>	105lm/W (4000K)
<b>Beam Angle</b>	110
<b>CRI</b>	80
<b>CCT</b>	3000/4000/6500K
<b>Input</b>	220-240V
<b>Operating Temp</b>	0°C - 45°C
<b>SDCM</b>	6
<b>UGR</b>	23
<b>Product Weight without Packaging</b>	2.91 kg

### TECHNICAL INFORMATION

<b>Light Source</b>	LED
<b>Colour / Finish</b>	Black
<b>IP Rating</b>	IP20
<b>Class Protection</b>	1
<b>Internal / External</b>	Internal
<b>Surface / Recessed / Suspended</b>	Ceiling, Suspended, Wall
<b>Lumen Depreciation</b>	L80 70,000h
<b>Warranty (Years)</b>	5
<b>CE Mark</b>	Yes
<b>Height</b>	75 mm
<b>Accessories</b>	AVASLED/LC, AVASLED/90, AVASLED/90/B
<b>Emergency Output Duration</b>	3 Hr






<b>Category</b>	Commercial Linear
<b>Application</b>	Commercial, Education
<b>Specification</b>	Architectural

# Vasco

Vasco CCT Bi-directional Suspended Linear 1500mm Emergency Black

**Code:** AVASLED5/B/M3

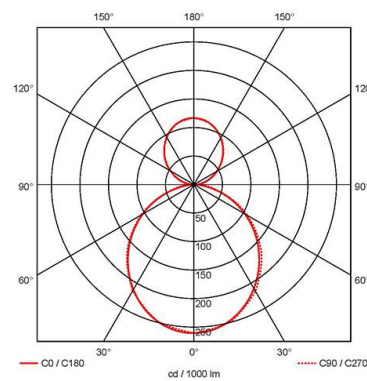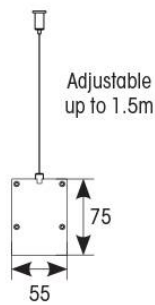

## ACCESSORIES

AVAS/P3/1/B	Vasco Three Circuit Track Adaptor Black
AVAS/WM/1	Vasco Wall Mounting Kit
AVASLED/90/B	Vasco CCT 90° Corner Connector Black
AVASLED/B/SK	Vasco CCT Suspension Kit Black
AVASLED/LC	Vasco CCT Continuous Linking Connector

