


Vision

Vision CCT Dual Wattage Switch Dim DALI-Code: AVIL/1/W/DD1/DM3

Category	Bulkheads
Application	Ancillary, Hospitality, Outdoor, Residential, Retail
Specification	Performance

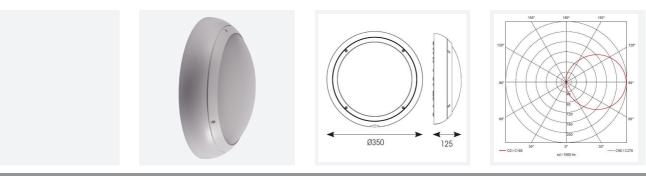

PRODUCT FEATURES

- IP65 CCT polycarbonate luminaire suitable for healthcare, educational, commercial and industrial applications
- UV stabilised polycarbonate constructions allows installation into areas exposed to adverse weather conditions
- Clip in gear tray ensures quick installation
- Dimmable, Photocell, MWS and Emergency options available

- CCT selectable between 3000K and 4000K and power selectable; offering a choice of 2
 outputs, in one luminaire
- Top, bottom and side conduit entry covers retain sleek appearance when not in use
- · Corridor function options available for effective reduction in energy consumption
- Powered by Tridonic

GENERAL INFORMATION		
Wattage	18W	
Lumens Delivered	1300lm - 2100lm	
Lm/W	130lm/W - 120lm/W	
Beam Angle	110	
CRI	80	
CCT	3000/4000K	
Input	220-240V	
Operating Temp	5°C - 40°C	
SDCM	3	
Energy efficiency class	C	
Product Weight without Packag	ing 1.57 kg	

CHNICAL INFORMATION
LED
White
IP65
2
Internal / External
Ceiling, Wall
L80 54,000h
5
Yes
350 mm
110 mm