


Vision

Vision CCT Dual Wattage Microwave Sensor Code: AVIL/1/W/MWS/PC

| | tegory | Bulkheads |
|---------------------------|-------------|--|
| Specification Performance | plication | Ancillary, Hospitality, Outdoor, Residential, Retail |
| | ecification | Performance |

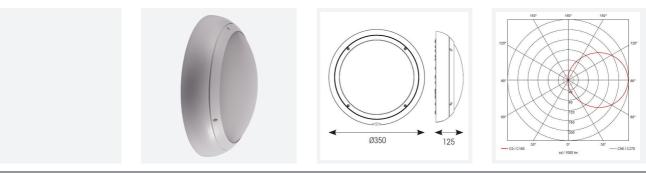

PRODUCT FEATURES

- IP65 CCT polycarbonate luminaire suitable for healthcare, educational, commercial and industrial applications
- UV stabilised polycarbonate constructions allows installation into areas exposed to adverse weather conditions
- Clip in gear tray ensures quick installation
- Dimmable, Photocell, MWS and Emergency options available

- CCT selectable between 3000K and 4000K and power selectable; offering a choice of 2
 outputs, in one luminaire
- Top, bottom and side conduit entry covers retain sleek appearance when not in use
- Corridor function options available for effective reduction in energy consumption
- Powered by Tridonic

| GENERAL INFORMATION | | | |
|----------------------------------|-------------------|--|--|
| Wattage | 9W - 18W | | |
| Lumens Delivered | 1300lm - 2100lm | | |
| Lm/W | 130lm/W - 120lm/W | | |
| Beam Angle | 110 | | |
| CRI | 80 | | |
| CCT | 3000/4000K | | |
| Input | 220-240V | | |
| Operating Temp | 5°C - 40°C | | |
| SDCM | 3 | | |
| Energy efficiency class | C | | |
| Product Weight without Packaging | 1.57 kg | | |

| TECHN | ICAL INFORMATION | |
|--------------------------------|---------------------|--|
| Light Source | LED | |
| Colour / Finish | White | |
| IP Rating | IP65 | |
| Class Protection | 2 | |
| Internal / External | Internal / External | |
| Surface / Recessed / Suspended | Ceiling, Wall | |
| Lumen Depreciation | L80 54,000h | |
| Warranty (Years) | 5 | |
| CE Mark | Yes | |
| Diameter | 350 mm | |
| Height | 110 mm | |
| | | |