




## Z LED ECO

Z LED ECO Highbay 3 Cool White Code: AZLE3/1/CW

Category	High/Low Bay	
Application	Ancillary, Hospitality, Industrial, Retail	
Specification	Performance	

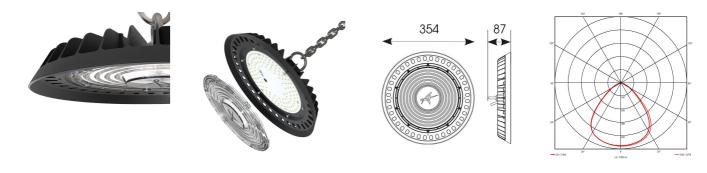

- Sleek and robust LED low/high bay for industrial applications and ancillary areas
- Lensed diffuser design helps to control the beam angle, offering better light distribution
- Integral on-board driver reduces the overall size and weight of product, resulting in a slim, lightweight and easy to install unit
- Alternative installation options by means of drop rods, jack chain and catenary wire.
- Die-cast powder coated construction and heatsink for optimum thermals and performance
- · High efficiency up to 120lm/w
- · Installation eye-bolt supplied as standard
- IP66 and IK09 ratings

GENERAL INFORMATION				
Wattage	200W			
Lumens Delivered	23500lm			
Lm/W	120lm/W			
Beam Angle	90			
CRI	80			
ССТ	4000K			
Input	220-240V			
Operating Temp	-45°C - 45°C			
SDCM	6			
UGR	28			
Energy efficiency class	E			
Product Weight without Packaging	1.87 kg			

TECHNICAL INFORMATION			
Light Source	LED		
Colour / Finish	Black		
IP Rating	IP66		
Class Protection	1		
Internal / External	Internal / External		
Surface / Recessed / Suspended	Suspended		
Lumen Depreciation	L80 54,000h		
Warranty (Years)	3		
CE Mark	Yes		
Diameter	354 mm		
Height	87 mm		