



Z LED Linear Opti-X

Part of the Commercial Linear product category



Model	Z LED Linear Opti-X Multi Beam Multi Wattage Black
Code	AZLX/1/CW
Application	Industrial

GENERAL INFORMATION

Input	220-240V
Wattage	100W/150W/200W
Operating Temp	-30°C - 40°C
Lumens Delivered	17000lm / 24000lm / 30000lm
lm/W	150lm/W
CCT	5000K
UGR	29
Beam Angle	N: 40/80 M: 50/100 W: 70/120 VW: 100/120

MATERIAL INFORMATION

Main Material	Aluminum
Diffuser Material	Polycarbonate
Product Weight without Packaging	6.4 kg
Colour / Finish	Black
Height	143 mm

TECHNICAL INFORMATION


Class Protection	1
Light Source	LED
SDCM (Initial Macadam)	3
CRI	80
Internal / External	Internal
Surface / Recessed / Suspended	Ceiling, Suspended
Power Factor	0.9
L70 @ 25°C	L70 B50 60,000h

PRODUCT FEATURES

- Powerful and durable multi-wattage and multi-beam angle surface-mounted IP65 linear high bay, perfect for the demands of all industrial applications, including warehouses, sorting areas, and production facilities.
- Enhanced functionality with two switches, allowing users to adjust the output between 100W, 150W, and 200W and change the angle between four beam angle options: 40x80 / 50x100 / 70x120 / 100x120.
- This adaptability fits perfectly in diverse applications, such as in rented warehouses, where end-users can modify the installation to their specific needs with a simple switch change.
- Versatile installations at different heights possible when utilising the multi-output feature, catering to various racking heights and open areas, thanks to the changeable optic.
- All-in-one solution for multiple projects with just one item to stock, providing cost-efficiency and convenience

ACCESSORIES

AZPLLED/LC	Z LED Linear Linking Connector
------------	--------------------------------

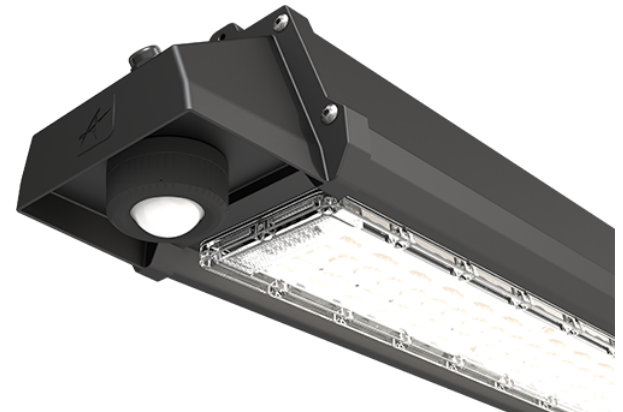



Z LED Linear Opti-X

Part of the Commercial Linear product category



Model Z LED Linear Opti-X Multi Beam Multi Wattage Black
Code AZLX/1/CW
Application Industrial

