




<b>Category</b>	High/Low Bay
<b>Application</b>	Ancillary, Hospitality, Industrial, Retail
<b>Specification</b>	Performance

## Z LED Performance

Z LED Performance 1 Cool White

Code: AZPELED/1

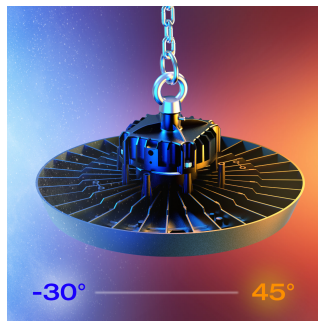

- Robust LED low/high bay for industrial, commercial and retail applications
- Alternative installation options by means of drop rods, jack chain and catenary wire
- Bracket accessories available for ceiling or wall mounting
- 1-10V dimmable as standard
- Die-cast powder coated construction and heatsink for optimum thermals and performance
- Additional lens options offer mid (85°) and narrow (55°) beam angles; ideal for racking aisles
- Pre-wired with 1.5M of H07RN-F cable for ease and speed of installation

### GENERAL INFORMATION

<b>Wattage</b>	100W
<b>Lumens Delivered</b>	15000lm
<b>Lm/W</b>	150lm/W
<b>Beam Angle</b>	110
<b>CRI</b>	80
<b>CCT</b>	4000K
<b>Input</b>	220-240V
<b>Operating Temp</b>	-30°C - 45°C
<b>SDCM</b>	3
<b>Product Weight without Packaging</b>	2.386 kg

### TECHNICAL INFORMATION

<b>Light Source</b>	LED
<b>Colour / Finish</b>	Black
<b>IP Rating</b>	IP65
<b>Class Protection</b>	1
<b>Internal / External</b>	Internal / External
<b>Surface / Recessed / Suspended</b>	Ceiling, Suspended
<b>Lumen Depreciation</b>	L80 54,000h
<b>Warranty (Years)</b>	5
<b>CE Mark</b>	Yes
<b>Diameter</b>	308 mm
<b>Height</b>	181 mm
<b>Accessories</b>	AZPELED/FB1, AZPELED/REF




<b>Category</b>	High/Low Bay
<b>Application</b>	Ancillary, Hospitality, Industrial, Retail
<b>Specification</b>	Performance


# Z LED Performance

Z LED Performance 1 Cool White

**Code:** AZPELED/1

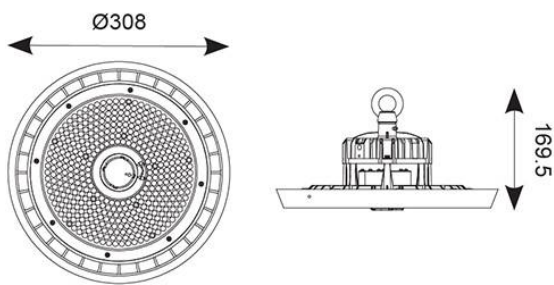

AZPELED/1

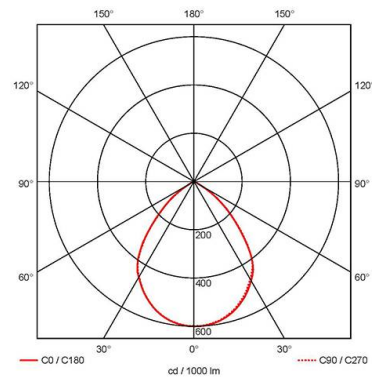

## ACCESSORIES

AZPELED/FB1	Z LED Performance 1 & 2 Mounting Bracket
AZPELED/REF	Z LED Performance Aluminium Reflector