




|                      |  |
|----------------------|--|
| <b>Category</b>      | High/Low Bay                               |
| <b>Application</b>   | Ancillary, Hospitality, Industrial, Retail |
| <b>Specification</b> | Performance                                |

## Z LED Performance

Z LED Performance 2 Cool White

**Code:** AZPELED/2

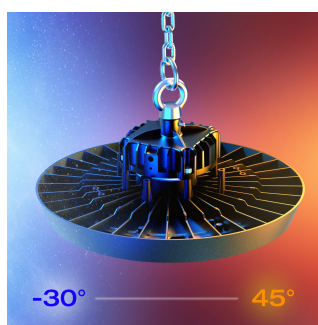

### PRODUCT FEATURES

- Robust LED low/high bay for industrial, commercial and retail applications
- Alternative installation options by means of drop rods, jack chain and catenary wire
- Bracket accessories available for ceiling or wall mounting
- 1-10V dimmable as standard
- Die-cast powder coated construction and heatsink for optimum thermals and performance
- Additional lens options offer mid (85°) and narrow (55°) beam angles; ideal for racking aisles
- Pre-wired with 1.5M of H07RN-F cable for ease and speed of installation

### GENERAL INFORMATION

|   |              |
|---|--------------|
| <b>Wattage</b>                          | 150W         |
| <b>Lumens Delivered</b>                 | 23000lm      |
| <b>Lm/W</b>                             | 150lm/W      |
| <b>Beam Angle</b>                       | 110          |
| <b>CRI</b>                              | 80           |
| <b>CCT</b>                              | 4000K        |
| <b>Input</b>                            | 220-240V     |
| <b>Operating Temp</b>                   | -30°C - 45°C |
| <b>SDCM</b>                             | 3            |
| <b>UGR</b>                              | 28           |
| <b>Product Weight without Packaging</b> | 2.661 kg     |

### TECHNICAL INFORMATION

|                                       |                          |
|---------------------------------------|--------------------------|
| <b>Light Source</b>                   | LED                      |
| <b>Colour / Finish</b>                | Black                    |
| <b>IP Rating</b>                      | IP65                     |
| <b>IK Rating</b>                      | IK08                     |
| <b>Class Protection</b>               | 1                        |
| <b>Internal / External</b>            | Internal / External      |
| <b>Surface / Recessed / Suspended</b> | Ceiling, Suspended       |
| <b>Lumen Depreciation</b>             | L80 54,000h              |
| <b>Warranty (Years)</b>               | 5                        |
| <b>CE Mark</b>                        | Yes                      |
| <b>Diameter</b>                       | 321 mm                   |
| <b>Height</b>                         | 180 mm                   |
| <b>Accessories</b>                    | AZPELED/FB1, AZPELED/REF |





|               |  |
|---------------|--|
| Category      | High/Low Bay                               |
| Application   | Ancillary, Hospitality, Industrial, Retail |
| Specification | Performance                                |

## Z LED Performance

Z LED Performance 2 Cool White

Code: AZPELED/2

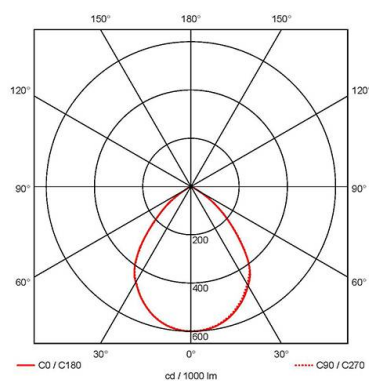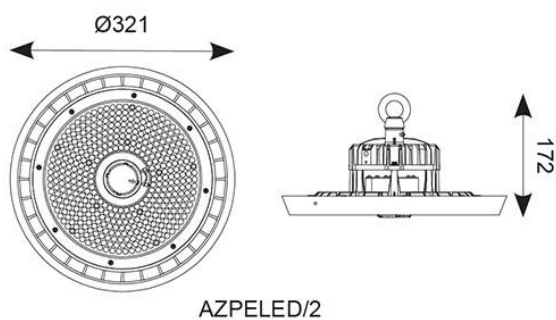

### ACCESSORIES

|             |  |
|-------------|--|
| AZPELED/FB1 | Z LED Performance 1 & 2 Mounting Bracket |
| AZPELED/REF | Z LED Performance Aluminium Reflector    |