





| | |
|----------------------|--|
| Category | High/Low Bay |
| Application | Ancillary, Hospitality, Industrial, Retail |
| Specification | Performance |

Z LED Linear

Z LED Linear 3 Emergency
Code: AZPLLED/3/M3



PRODUCT FEATURES

- Powerful and durable surface mounted IP65 linear high bay, perfect for the demands of industrial applications
- 1.5m Suspension kit supplied as standard
- Plug and play microwave sensor option, offering maximum energy saving
- Surface mounting possible with AZPLLED/LC accessory
- Die-cast aluminium construction provides enhanced thermal performance for longer LED lifespan
- 0/1-10V dimmable as standard (installer must drill through pilot hole and use an IP rated gland on install)

GENERAL INFORMATION

| | |
|---|------------|
| Wattage | 200W |
| Lumens Delivered | 28000lm |
| Lm/W | 140lm/W |
| Beam Angle | 25/115 |
| CRI | 80 |
| CCT | 5000K |
| Input | 220-240V |
| Operating Temp | 0°C - 45°C |
| SDCM | 4 |
| Product Weight without Packaging | 8.07 kg |

TECHNICAL INFORMATION

| | |
|---------------------------------------|---------------------------------------|
| Light Source | LED |
| Colour / Finish | Black |
| IP Rating | IP65 |
| IK Rating | IK10 |
| Class Protection | 1 |
| Internal / External | Internal / External |
| Surface / Recessed / Suspended | Ceiling, Suspended |
| Lumen Depreciation | L80 54,000h |
| Warranty (Years) | 5 |
| CE Mark | Yes |
| Height | 134 mm |
| Accessories | AZPLLED/MWS, AZPLLED/LC, AZPLLED/MWSP |
| Emergency Output Duration | 3 Hr |





| | |
|----------------------|--|
| Category | High/Low Bay |
| Application | Ancillary, Hospitality, Industrial, Retail |
| Specification | Performance |

Z LED Linear

Z LED Linear 3 Emergency

Code: AZPLLED/3/M3

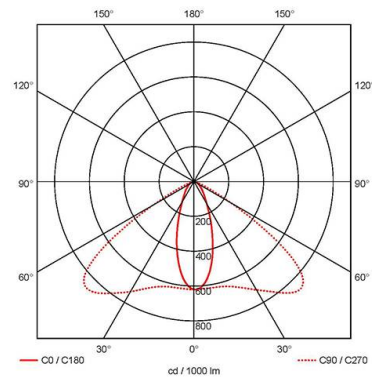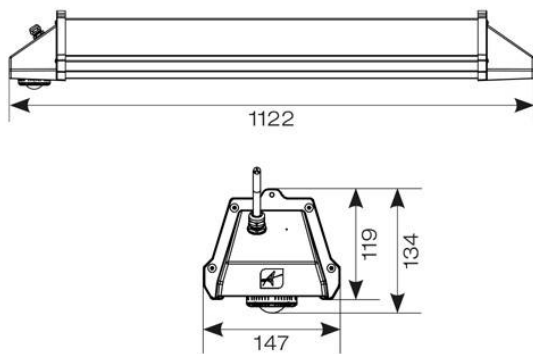

ACCESSORIES

| | |
|--------------|--|
| AZPLLED/MWS | Z LED Linear Plug-in Microwave Sensor |
| AZPLLED/LC | Z LED Linear Linking Connector |
| AZPLLED/MWSP | Z LED Linear Microwave Sensor Programmer |