









CLEDTRI


Surface mounted triangle brushed nickel cabinet downlight 1.7W LED 3000K

DESCRIPTION

Alternative energy efficient option to a traditional halogen lamp ideal for cabinet or kitchen under cabinet lighting, giving a warm white ambient light for functional and subtle lit appearance

FEATURES

- Visually similar to 20W G4 halogen
- 3000K warm colour temperature: offering a pleasing lighting appearance
- Ideal low energy solution to standard halogen cabinet lights
- · Not suitable for use with dimmers
- · Pre-wired with 2m mains cable and no separate driver required: facilitating easy installation



GENERAL INFORMATION				
Light Source	LED	Colour / Finish	Brushed nickel effect	
Application	Internal	Mounting Type	Surface	
Product Warranty	5 Years	Net Weight	0.25 kg	
Energy Efficiency Class	G			

TEAUNIO AL INITORIA TIONI				
TECHNICAL INFORMATION				
Nominal Voltage	240 V	Frequency	50-60Hz	
Class Protection	2	Operating Temperature (Min)	25 °C	
Average Rated Life	30,000 h	Number of switching cycles	15,000	
Construction Materials Line 1	Zinc Alloy	Construction Materials Line 2	Acrylic	
Dimensions - Height	120 mm	Dimensions - Width	120 mm	
Dimensions - Depth	41 mm			

PRODUCT INFORMATION				
Wattage Combined	1.7W	CCT Combined	3000K	
Luminaire Lumens Combined	160 lm	lm/W Combined	94 lm/w	
Beam Angle	90°	CRI	80	
SDCM	<6	Lumen Maintenance	0.7	
IP Rating	IP20			














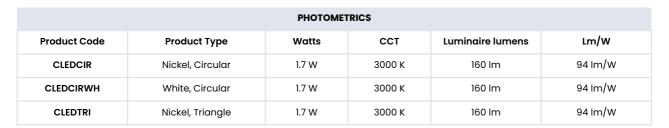

P20

PACKAGING		
Packaging Type	Colour Box	
Individual unit gross weight	219 g	
Pallet Layer Qty	240	
Pallet Layers	4	
Pallet Qty	960	
MOM / OPQ	1 / 40	







