

Reba


Reba Power CCT IP65 Square Pris Black

DESCRIPTION

The Reba IP65 utility bulkhead comes in circular, square, opal, prismatic, white and black to suit the varying project requirements. The range is fully adjustable with 3 outputs and 5 colour temperature options. Multiple conduit entries and a BESA fixing point ensures multiple install methods are met, while the plug and play emergency and microwave sensor accessories offer quick and convenient flexibility.

FEATURES

- Power selectable 8W, 14W, 16W
- Colour temperature selectable, 2700K, 3000K, 4000K, 5000K, 6000K
- IP65 and IK10 rating
- Multiple 20mm conduit entry points and rear BESA mounting
- Prismatic and Opal screw on diffusers
- Plug and play emergency pack and on/off or step dim sensors available
- Loop in, loop out push fit terminals
- 5 year warranty
- 5 year warranty

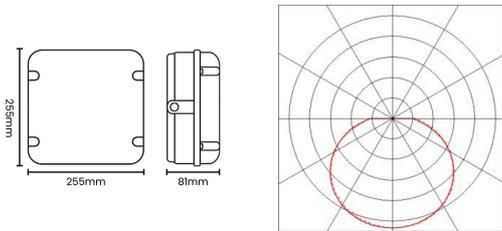

GENERAL INFORMATION

Light Source	LED	Colour / Finish	Black
Application	Internal/External	Mounting Type	Surface
Product Warranty	5 Years	Net Weight	0.57 kg
Energy Efficiency Class	D		

TECHNICAL INFORMATION

Nominal Voltage	240	Frequency	50Hz
Class Protection	2	Operating Temperature (Min)	-20 °C
Operating Temperature (Max)	45 °C	Average Rated Life	50,000 h
Number of switching cycles	25,000	Construction Materials Line 1	Polycarbonate
Construction Materials Line 2	ABS	Dimensions - Height	255 mm
Dimensions - Width	255 mm	Dimensions - Depth	81 mm
IK Rating	IK10	IP Rating	IP65

PRODUCT INFORMATION

Wattage Combined	8W / 14W / 16W	CCT Combined	2700K / 3000K / 4000K / 5000K / 6000K
Luminaire Lumens Combined	1200 - 2145 lm	lm/W Combined	150 - 134 lm/w
Beam Angle	120°	CRI	80



SDCM	<6	Lumen Maintenance	0.7
Dimmable	Not Dimmable	Displacement Factor	0.9
CCT1/WATT1: Rated Peak Intensity	113 cd	CCT1/WATT2: Rated Peak Intensity	113 cd
CCT1/WATT3: Rated Peak Intensity	152 cd	CCT2/WATT1: Rated Peak Intensity	111 cd
CCT2/WATT2: Rated Peak Intensity	111 cd	CCT2/WATT3: Rated Peak Intensity	124 cd
CCT3/WATT1: Rated Peak Intensity	111 cd	CCT3/WATT2: Rated Peak Intensity	111 cd
CCT3/WATT3: Rated Peak Intensity	124 cd	CCT4/WATT1: Rated Peak Intensity	111 cd
CCT4/WATT2: Rated Peak Intensity	111 cd	CCT4/WATT3: Rated Peak Intensity	124 cd
CCT5/WATT1: Rated Peak Intensity	111 cd	CCT5/WATT2: Rated Peak Intensity	111 cd
CCT4/WATT1: Rated Peak Intensity	124 cd		



IP65



IK10



Colour Temp.
Selectable



Power
Selectable



PHOTOMETRICS					
Product Code	Product Type	Watts	CCT	Luminaire lumens	Lm/W
E02RAS1B	Standard, Square Prismatic, Black	8	2700 K	1200 lm	150 lm/W
			3000 K	1200 lm	150 lm/W
			4000 K	1200 lm	150 lm/W
			5000 K	1200 lm	150 lm/W
			6000 K	1200 lm	150 lm/W
		14	2700 K	1850 lm	132 lm/W
			3000 K	1850 lm	132 lm/W
			4000 K	1850 lm	132 lm/W
			5000 K	1850 lm	132 lm/W
			6000 K	1850 lm	132 lm/W
		16 W	2700 K	2145 lm	134 lm/W
			3000 K	2145 lm	134 lm/W
			4000 K	2145 lm	134 lm/W
			5000 K	2145 lm	134 lm/W
			6000 K	2145 lm	134 lm/W

PACKAGING	
Packaging Type	Brown Box
Individual unit gross weight	118.57 g
Pallet Layer Qty	60
Pallet Layers	2
Pallet Qty	120
MOM / OPQ	1 / 10



IP65



IK10



Colour Temp.
Selectable



Power
Selectable

