


Amplus/Foris

Amplus Foris Plug Play 3W Standard Emergency Pack

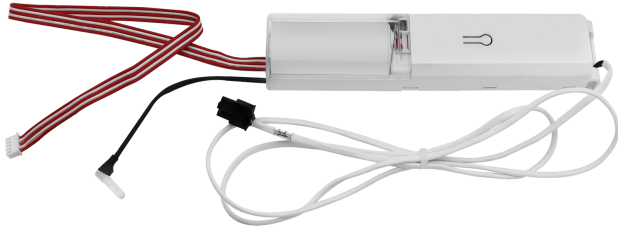


DESCRIPTION

Push in standard 3W emergency pack suitable for use with the Amplus and Foris linear ranges. Emergency pack installs into the main housing with a simplified design which has colour coded emergency cables and plug connections to support quick installation.

FEATURES

- Compatible with the Amplus and Foris range
- 3 hour emergency pack manual test
- 3W output in emergency mode
- Rubber grommet supplied for LED indicator install into Amplus
- Rubber grommet pre installed for LED indicator install into Foris
- 6.4V 1500mAh LiFePO4 battery 5 year warranty - replacement battery code: EB33



GENERAL INFORMATION

Colour / Finish	White	Application	Internal
Mounting Type	Surface	Product Warranty	5 Years
Battery Warranty	5 Years	Net Weight	2.25 kg

TECHNICAL INFORMATION

Nominal Voltage	240 V	Frequency	50Hz
Class Protection	2	Operating Temperature (Min)	-20 °C
Operating Temperature (Max)	45 °C	Construction Materials Line 1	Polycarbonate
Dimensions - Height	25 mm	Dimensions - Width	22 mm
Dimensions - Depth	105 mm		



PHOTOMETRICS					
Product Code	Product Type	Watts	CCT	Luminaire lumens	Lm/W
E04AP4AC	Non-Dimmable, 4ft	21 W	3000 K	3150 lm	150 lm/W
			4000 K	3150 lm	150 lm/W
			6000 K	3150 lm	150 lm/W
		27 W	3000 K	4050 lm	150 lm/W
			4000 K	4050 lm	150 lm/W
			6000 K	4050 lm	150 lm/W
		32 W	3000 K	4800 lm	150 lm/W
			4000 K	4800 lm	150 lm/W
			6000 K	4800 lm	150 lm/W
		38 W	3000 K	5700 lm	150 lm/W
			4000 K	5700 lm	150 lm/W
			6000 K	5700 lm	150 lm/W
E04AP5AC	Non-Dimmable, 5ft	29 W	3000 K	4350 lm	150 lm/W
			4000 K	4350 lm	150 lm/W
			6000 K	4350 lm	150 lm/W
		36 W	3000 K	5400 lm	150 lm/W
			4000 K	5400 lm	150 lm/W
			6000 K	5400 lm	150 lm/W
		44 W	3000 K	6600 lm	150 lm/W
			4000 K	6600 lm	150 lm/W
			6000 K	6600 lm	150 lm/W
		52 W	3000 K	7800 lm	150 lm/W
			4000 K	7800 lm	150 lm/W
			6000 K	7800 lm	150 lm/W
E04AP6AC	Non-Dimmable, 6ft	33 W	3000 K	4950 lm	150 lm/W
			4000 K	4950 lm	150 lm/W
			6000 K	4950 lm	150 lm/W
		42 W	3000 K	6300 lm	150 lm/W
			4000 K	6300 lm	150 lm/W
			6000 K	6300 lm	150 lm/W
		51 W	3000 K	7650 lm	150 lm/W
			4000 K	7650 lm	150 lm/W
			6000 K	7650 lm	150 lm/W
		60 W	3000 K	9000 lm	150 lm/W
			4000 K	9000 lm	150 lm/W
			6000 K	9000 lm	150 lm/W

PACKAGING	
Packaging Type	Plain Box
Individual unit gross weight	274 g
Pallet Qty	0
MOM / OPQ	1 / 40

