


Verus

Verus Plug Play 3W Standard Emergency Pack

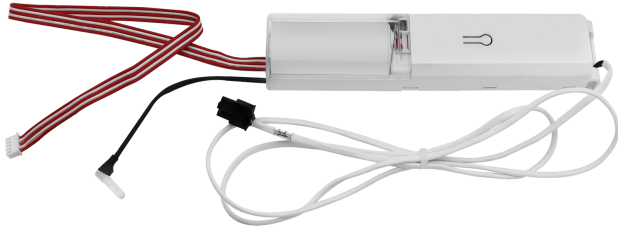


DESCRIPTION

Push in standard 3W emergency pack suitable for use with the Amplus and Foris linear ranges. Emergency pack installs into the main housing with a simplified design which has colour coded emergency cables and plug connections to support quick installation.

FEATURES

- Compatible with the Verus range
- 3 hour emergency pack manual test
- 3W output in emergency mode
- Complete with compatible plugs for easy install to the Verus batten
- Battery - 6.4V 1500mAh LiFePO4 - battery 5 year warranty - replacement battery code: EB33



GENERAL INFORMATION

Colour / Finish	White	Application	Internal
Mounting Type	Surface	Product Warranty	5 Years
Battery Warranty	5 Years	Net Weight	0.22 kg

TECHNICAL INFORMATION

Nominal Voltage	240 V	Frequency	50Hz
Class Protection	1	Operating Temperature (Min)	-20 °C
Operating Temperature (Max)	45 °C	Construction Materials Line 1	Polycarbonate
Dimensions - Height	25 mm	Dimensions - Width	40 mm
Dimensions - Depth	185 mm		



PHOTOMETRICS					
Product Code	Product Type	Watts	CCT	Luminaire lumens	Lm/W
E04VS4AC	Non-Dimmable, 4ft	21 W	3000 K	2625 lm	125 lm/W
			4000 K	2625 lm	125 lm/W
			6000 K	2625 lm	125 lm/W
		27 W	3000 K	3375 lm	125 lm/W
			4000 K	3375 lm	125 lm/W
			6000 K	3375 lm	125 lm/W
		32 W	3000 K	4000 lm	125 lm/W
			4000 K	4000 lm	125 lm/W
			6000 K	4000 lm	125 lm/W
		38 W	3000 K	4750 lm	125 lm/W
			4000 K	4750 lm	125 lm/W
			6000 K	4750 lm	125 lm/W
E04VS5AC	Non-Dimmable, 5ft	32 W	3000 K	4000 lm	125 lm/W
			4000 K	4000 lm	125 lm/W
			6000 K	4000 lm	125 lm/W
		41 W	3000 K	5125 lm	125 lm/W
			4000 K	5125 lm	125 lm/W
			6000 K	5125 lm	125 lm/W
		50 W	3000 K	6250 lm	125 lm/W
			4000 K	6250 lm	125 lm/W
			6000 K	6250 lm	125 lm/W
		58 W	3000 K	7250 lm	125 lm/W
			4000 K	7250 lm	125 lm/W
			6000 K	7250 lm	125 lm/W
E04VS6AC	Non-Dimmable, 6ft	36 W	3000 K	4500 lm	125 lm/W
			4000 K	4500 lm	125 lm/W
			6000 K	4500 lm	125 lm/W
		46 W	3000 K	5750 lm	125 lm/W
			4000 K	5750 lm	125 lm/W
			6000 K	5750 lm	125 lm/W
		55 W	3000 K	6875 lm	125 lm/W
			4000 K	6875 lm	125 lm/W
			6000 K	6875 lm	125 lm/W
		65 W	3000 K	8125 lm	125 lm/W
			4000 K	8125 lm	125 lm/W
			6000 K	8125 lm	125 lm/W

PACKAGING	
Packaging Type	Plain Box
Individual unit gross weight	243 g
Pallet Qty	0
MOM / OPQ	1 / 40

