



110V A-Frame


110V Weatherproof with A-Frame 20W 4000K

DESCRIPTION

The 110V anti-corrosive linear batten with A-Frame, comes complete with two integrated 110V sockets, and a 5m cable and plug in socket with cable storage facility.

FEATURES

- High lumen efficiency 120lm/W
- IP65 IK08 rated
- Supplied with 5m cable and pre-wired plug
- Includes 2 x 110V power outlets for connecting more fittings or power tools
- 2 cable tidy hooks on the stand
- Stainless steel clips – flat head screwdriver required to gain entry
- Emergency version available
- 3 year warranty

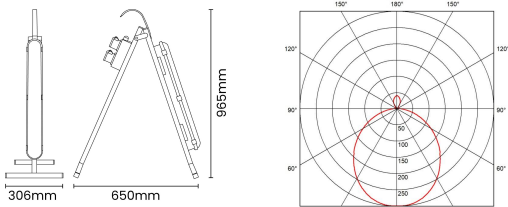

GENERAL INFORMATION

Light Source	LED	Colour / Finish	Yellow
Application	Internal/External	Mounting Type	Surface
Product Warranty	3 years	Battery Warranty	3 Years
Net Weight	3.26	Energy Efficiency Class	D

TECHNICAL INFORMATION


Nominal Voltage	110	Frequency	50Hz
Class Protection	1	Operating Temperature (Min)	-20
Operating Temperature (Max)	45	Average Rated Life	50,000
Number of switching cycles	25,000	Construction Materials Line 1	ABS
Construction Materials Line 2	Polycarbonate diffuser	Dimensions - Height	965
Dimensions - Width	306	Dimensions - Depth	650
IK Rating	IK08	IP Rating	IP65

PRODUCT INFORMATION

Wattage Combined	20W	CCT Combined	4000K
Luminaire Lumens Combined	2400 lm	lm/W Combined	120 lm/w
Beam Angle	120°	CRI	80
SDCM	<6	Lumen Maintenance	0.7



Emergency Lumen Output	250	Lighting Technology used	LED
Non-Directional or Directional	NDLS	Mains or non-mains	NMLS
Connected light source (CLS)	FALSE	Colour tuneable light source	FALSE
High Luminance light source	FALSE	Anti Glare shield	FALSE
Dimmable	Not Dimmable	Correlated Colour temperature type	SINGLE_VALUE
Correlated Colour temperature (K) 1	4,000	Chromaticity coordinates x	0.3863
Chromaticity coordinates y	0.385	Peak Luminous Intensity (cd)	720 cd
Stroboscopic effect metric (SVM)	0.04	Flicker Metric (pst)	0.1
R9 colour rendering index	8	Survival factor @6000hrs	0.8
Spectrum report available	Yes	Displacement Factor	0.9
CCTI/WATTI: Rated Peak Intensity	720		



PHOTOMETRICS					
Product Code	Product Type	Watts	CCT	Luminaire lumens	Lm/W
E14AF	Standard	20 W	4000	2400 lm	120
E14AFI	2 in 1 Switchable Emergency / Self-Test	20 W	4000	2400 lm	120

PACKAGING	
Individual unit gross weight	326
Pallet Qty	0
MOM / OPQ	1 / 1

