

110V IP65 Twinspot 400lm Standard EM

110V IP65 Emergency Twinspot 2x 2.5W 6000K




DESCRIPTION

The 110V IP65 Emergency Twinspot features two fully adjustable heads delivering a combined 400 lumen output for reliable emergency site lighting. Designed for quick, hassle-free installation, this non-maintained unit is ideal for commercial and industrial applications.

FEATURES

- Polycarbonate IP65 IK08 construction
- Twin 2.5W LED adjustable and tiltable heads
- Push fit terminals
- 20mm side entry points
- 3 hour non-maintained manual test function

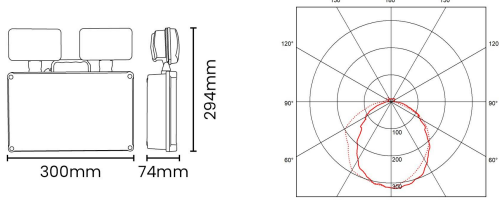

GENERAL INFORMATION

Light Source	LED	Colour / Finish	Yellow
Application	Internal/External	Mounting Type	Surface
Product Warranty	3 years	Battery Warranty	3 Years
Net Weight	0.9		

TECHNICAL INFORMATION

Nominal Voltage	110	Frequency	50Hz
Class Protection	2	Operating Temperature (Min)	-20
Operating Temperature (Max)	45	Average Rated Life	50,000
Number of switching cycles	25,000	Construction Materials Line 1	ABS
Construction Materials Line 2	Polycarbonate diffuser	Dimensions - Height	294
Dimensions - Width	300	Dimensions - Depth	74
IK Rating	IK08	IP Rating	IP65

PRODUCT INFORMATION

Wattage Combined	5W	CCT Combined	6000K
Luminaire Lumens Combined	400 lm	lm/W Combined	80 lm/w
Beam Angle	120°	CRI	80
SDCM	<6	Lumen Maintenance	0.7



Emergency Lumen Output	400	Lighting Technology used	LED
Non-Directional or Directional	NDLS	Mains or non-mains	MLS
Connected light source (CLS)	FALSE	Colour tuneable light source	FALSE
High Luminance light source	FALSE	Anti Glare shield	FALSE
Dimmable	Not Dimmable	Correlated Colour temperature type	SINGLE_VALUE
Correlated Colour temperature (K) 1	6,000	Chromaticity coordinates x	0.324
Chromaticity coordinates y	0.33	Peak Luminous Intensity (cd)	456 cd
Stroboscopic effect metric (SVM)	0.04	Flicker Metric (pst)	0.1
R9 colour rendering index	1	Survival factor @6000hrs	0.8
Spectrum report available	Yes	Displacement Factor	0.9
CCTI/WATTI: Rated Peak Intensity	456		



PHOTOMETRICS

Product Code	Product Type	Watts	CCT	Luminaire lumens	Lm/W
E14TW1	Emergency	5 W	6000	400 lm	80

PACKAGING

Packaging Type	Brown Box
Individual unit gross weight	900
Pallet Layer Qty	30
Pallet Layers	4
Pallet Qty	120
MOM / OPQ	1 / 10



IP65



IK08

