


## 110V Weatherproof

110V 35W 4000K LED Anti Corrosive 5FT  
Emergency Batten

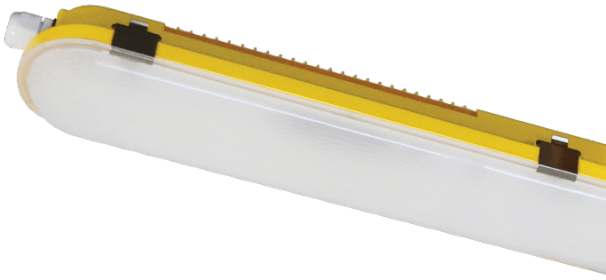


### DESCRIPTION

The 110V anti-corrosive linear batten, available in 2ft, 4ft & 5ft comes complete with pre-drilled 20mm conduit entry points (capped), stainless steel retaining clips as standard and flexible bracket sliders to suit retrofit positioning.

### FEATURES

- High lumen efficiency 120lm/W
- IP65 IK08 rated
- 20mm conduit entry at both ends and rear (ends predrilled and capped)
- Stainless steel clips - flat head screwdriver required to gain entry
- Supplied with IP cable grommet and 2x ceiling brackets
- 3 year warranty

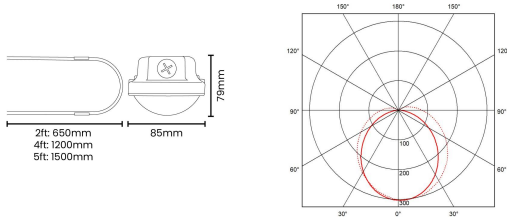

### GENERAL INFORMATION

Light Source	LED	Colour / Finish	Yellow
Application	Internal/External	Mounting Type	Surface, Suspended
Product Warranty	3 years	Battery Warranty	3 Years
Net Weight	1.76	Energy Efficiency Class	D

### TECHNICAL INFORMATION

Nominal Voltage	110	Frequency	50Hz
Class Protection	1	Operating Temperature (Min)	-20
Operating Temperature (Max)	45	Average Rated Life	50,000
Number of switching cycles	25,000	Construction Materials Line 1	ABS
Construction Materials Line 2	Polycarbonate diffuser	Dimensions - Height	79
Dimensions - Width	85	Dimensions - Depth	1500
IK Rating	IK08	IP Rating	IP65

### PRODUCT INFORMATION

Wattage Combined	35W	CCT Combined	4000K
Luminaire Lumens Combined	4540 lm	lm/W Combined	130 lm/w
Beam Angle	120°	CRI	80
SDCM	<6	Lumen Maintenance	0.7



Emergency Lumen Output	250	Lighting Technology used	LED
Non-Directional or Directional	NDLS	Mains or non-mains	MLS
Connected light source (CLS)	FALSE	Colour tuneable light source	FALSE
High Luminance light source	FALSE	Anti Glare shield	FALSE
Dimmable	Not Dimmable	Correlated Colour temperature type	SINGLE_VALUE
Correlated Colour temperature (K) 1	4,000	Chromaticity coordinates x	0.3864
Chromaticity coordinates y	0.335	Peak Luminous Intensity (cd)	1,467 cd
Stroboscopic effect metric (SVM)	0.04	Flicker Metric (pst)	0.1
R9 colour rendering index	8	Survival factor @6000hrs	0.8
Spectrum report available	Yes	Displacement Factor	0.9
CCTI/WATTI: Rated Peak Intensity	1,467		



**PHOTOMETRICS**

Product Code	Product Type	Watts	CCT	Luminaire lumens	Lm/W
E14WP2F	Standard	20 W	4000	2400 lm	120
E14WP2F1	Self Test Emergency, Emergency	20 W	4000	2400 lm	120
E14WP4F	Standard	25 W	4000	3105 lm	124
E14WP4F1	Self Test Emergency, Emergency	25 W	4000	3105 lm	124
E14WP5F	Standard	35 W	4000	4540 lm	130
E14WP5F1	Self Test Emergency, Emergency	35 W	4000	4540 lm	130

**PACKAGING**

Packaging Type	Brown Box
Individual unit gross weight	1,758
Pallet Qty	0
MOM / OPQ	1 / 6

