

Spec Sheet EXIT3MLED

5 Year Warranty

IP20

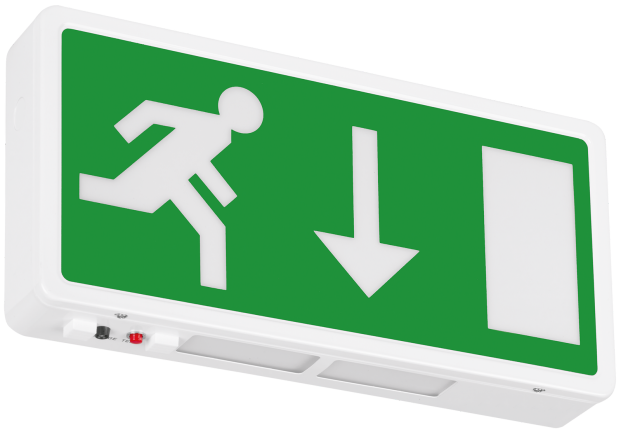



EXIT3MLED

Maintained 4W white emergency exit box with signs directive down arrow legend

DESCRIPTION

Low energy alternative to standard emergency exit signs, robust steel construction with traditional battery test button for easy access, suitable to be adjusted for non-maintained operation to suit a number of commercial and industrial applications

FEATURES

- 3 hour maintained mode as standard which can also be configured for non maintained operation
- Facility for remote switching
- Viewing distance: 32m
- LED charge light & battery test button
- Diffuser on base for downward illumination of exit path
- 55 lumens in mains mode
- Interchangeable polycarbonate Down arrow exit legend included. Full range of alternative legend directional panels available
- LiFePO4 1500mAh - 5 year warranty

GENERAL INFORMATION			
Light Source	LED	**Colour / Finish**	White
Application	Internal	**Mounting Type**	Surface
Product Warranty	5 Years	**Battery Warranty**	5 Years
Net Weight	1.47 kg		

TECHNICAL INFORMATION			
Nominal Voltage	240	**Frequency**	50-60Hz
Class Protection	1	**Operating Temperature (Min)**	0 °C
Operating Temperature (Max)	40 °C	**Average Rated Life**	30,000 h
Number of switching cycles	15,000	**Construction Materials Line 1**	Steel
Construction Materials Line 2	Polycarbonate down arrow legend	**Dimensions - Height**	192 mm
Dimensions - Width	390 mm	**Dimensions - Depth**	60 mm
IP Rating	IP20		

PRODUCT INFORMATION			
Wattage Combined	4W	**CCT Combined**	6500K
Luminaire Lumens Combined	55 lm	**lm/W Combined**	14 lm/w
Beam Angle	110°	**CRI**	79

UK Sales: 01933 673344 | E: sales@eterna-lighting.co.uk
IE Sales: +353 1 844 6300 | E: sales@eterna-lighting.ie

Registered In England No. 410716 VAT Reg. No. GB 229 3783 37
Registered In Ireland No. 018423 VAT Reg. No. IE 8R73602D

Spec Sheet EXIT3MLED

5 Year Warranty

IP20

SDCM	<6	**Lumen Maintenance**	0.8
Emergency Lumen Output	17 lm	**Dimmable**	Not Dimmable

PHOTOMETRICS					
Product Code	**Product Type**	**Watts**	**CCT**	**Luminaire lumens**	**Lm/W**
EXIT3MLED	Emergency	4 W	6500 K	55 lm	14 lm/W
SEEXIT3ML	Emergency	4 W	6500 K	55 lm	14 lm/W

ACCESSORIES		
Product Code	**Description**	**MOM / OPQ**
EB4	Ni-Cd 3.6V 1500mAh Side-by-side Battery	1 / 1
EBLGDL	Left Arrow Legend for Exitboxes	1 / 100
EBLGDR	Right Arrow Legend for Exitboxes	1 / 100
EBLGDU	Up Arrow Legend for Exitboxes	1 / 100
ISOEBLGDD	ISO Down Arrow Legend for Emergency Exitboxes	1 / 1
ISOEBLGDL	ISO Left Arrow Legend for Emergency Exitboxes	1 / 1
ISOEBLGDR	ISO Right Arrow Legend for Emergency Exitboxes	1 / 1
ISOEBLGDU	ISO Up Arrow Legend for Emergency Exitboxes	1 / 1

PACKAGING	
Packaging Type	Colour Box
Individual unit gross weight	1,500 g
Pallet Layer Qty	60
Pallet Layers	3
Pallet Qty	180
MOM / OPQ	1 / 6