



KEM3BULKLI


Maintained IP65 Emergency bulkhead 4W
LED 6400K with ISO 7010 legend set

DESCRIPTION

Rectangular functional maintained emergency bulkhead, able to be adjusted to non-maintained function. An energy efficient 4W solution offering 270 lumens in mains mode and 130 lumens in emergency mode. ISO7010 legend set provided with an option of signs directive available and a recessed frame to suit multiple applications

FEATURES

- Polycarbonate construction
- Hinged gear tray & push fit terminals
- 20mm gland entries as standard
- Viewing distance 20m
- Facility for remote switching and non-maintained mode
- 270 lm when connected to mains, 130 lm when connected to battery
- Minimum 3 hour functionality in emergency mode
- ISO 7010 legend set included
- 5 year battery warranty – Replacement battery code: EB17

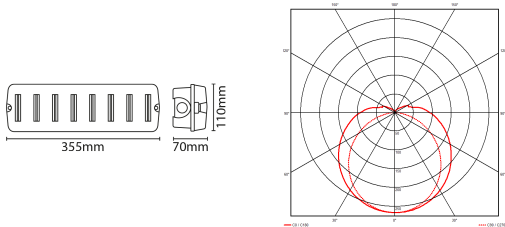

GENERAL INFORMATION

Light Source	LED	Colour / Finish	White
Application	Internal/External	Mounting Type	Surface
Product Warranty	5 Years	Battery Warranty	5 Years
Net Weight	0.47 kg		

TECHNICAL INFORMATION

Nominal Voltage	240 V	Frequency	50-60Hz
Class Protection	2	Operating Temperature (Min)	-20 °C
Operating Temperature (Max)	45 °C	Average Rated Life	40,000 h
Number of switching cycles	15,000	Construction Materials Line 1	Polycarbonate
Dimensions – Height	110 mm	Dimensions – Width	390 mm
Dimensions – Depth	70 mm		

PRODUCT INFORMATION

Wattage Combined	4.5W	CCT Combined	6400K
Luminaire Lumens Combined	250 lm	lm/W Combined	56 lm/w
Beam Angle	120°	CRI	80
SDCM	<6	Lumen Maintenance	0.9
IP Rating	IP65		





PHOTOMETRICS					
Product Code	Product Type	Watts	CCT	Luminaire lumens	Lm/W
KEM3BULKLI	Emergency	4.5 W	6400 K	250 lm	56 lm/W

ACCESSORIES		
Product Code	Description	MOM / OPQ
EB17	Li-Ion 3.2V 1500mAh Stick Battery	1 / 100
EB23	Li-Ion 3.2V 1000mAh Stick Battery	1 / 10
BFRAME	Semi-Recessed Emergency Bulkhead Frame	1 / 50

PACKAGING	
Packaging Type	Plain Box
Individual unit gross weight	564 g
Pallet Layer Qty	60
Pallet Layers	5
Pallet Qty	300
MOM / OPQ	1 / 10

