## Spec Sheet LEDLBAY120













## Linear low Bay 120W 14309lm LED 4000K nondimmable IP40 Black


## DESCRIPTION


A simple and practical range of low bays for warehouse lighting, the frosted diffuser creates an even light distribution making it suitable for a range of applications including public spaces and utility area, the range comes in 4 lengths enabling it to meet a number of differing output requirements and space constraints on a single project, the low bay comes complete with a suspension pack or brackets are available seperately

## **FEATURES**

- · Frosted polycarbonate diffuser & Aluminium housing
- Fitted with 1.5m mains input cable
- · Suspension pack included, max length 1.5m
- Bracket available separately for surface mounting or to enable installation with threaded rod
- >119 lm/W







GENERAL INFORMATION				
Light Source	LED	Colour / Finish	Black	
Application	Internal	Mounting Type	Surface, Suspended	
Product Warranty	5 Years	Net Weight	3.5 kg	
Energy Efficiency Class	E			

TECHNICAL INFORMATION				
Nominal Voltage	240 V	Frequency	50Hz	
Class Protection	1	Operating Temperature (Min)	-20 °C	
Operating Temperature (Max)	45 °C	Average Rated Life	50,000 h	
Number of switching cycles	25,000	Construction Materials Line 1	Aluminium	
Construction Materials Line 2	Polycarbonate	Dimensions - Height	81 mm	
Dimensions - Width	103 mm	Dimensions - Depth	1220 mm	

PRODUCT INFORMATION				
Wattage Combined	120W	CCT Combined	4000K	
Luminaire Lumens Combined	14310 lm	lm/W Combined	119 lm/w	
Beam Angle	120°	CRI	80	
SDCM	<6	Lumen Maintenance	0.8	
IP Rating	IP40	IK Rating	IK10	














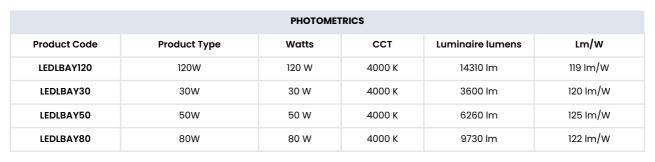

PACKAGING		
Packaging Type	Plain Box	
Individual unit gross weight	3,981 g	
Pallet Layer Qty	12	
Pallet Layers	5	
Pallet Qty	60	
MOM / OPQ	1/4	











