



## 1m Link Lead for Linkable Strip Light

1M white link lead for use with TUS linkable range

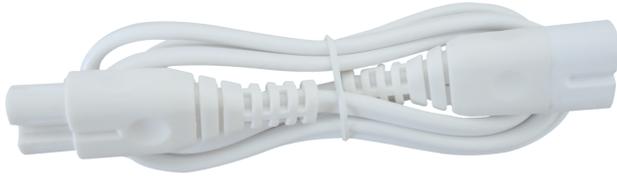

### DESCRIPTION

Long life, energy efficient alternative to traditional fluorescent under cabinet lights



### GENERAL INFORMATION

Colour / Finish	White	Application	Internal
Mounting Type	Surface	Product Warranty	1 Year
Net Weight	0.06 kg		

### TECHNICAL INFORMATION

Nominal Voltage	240	Frequency	50Hz
Construction Materials Line 1	PVC	Dimensions - Height	100 mm
IP Rating	IP20		

### PRODUCT INFORMATION

Luminaire Lumens Combined	-
---------------------------	---





IP20

## PACKAGING

<b>Packaging Type</b>	Header Card & Bag
<b>Individual unit gross weight</b>	54 g
<b>Intermediate Carton Depth (mm)</b>	100 mm
<b>Intermediate Carton Width (mm)</b>	195 mm
<b>Intermediate Carton Height (mm)</b>	60 mm
<b>Intermediate Pack Qty.</b>	5
<b>Pallet Qty</b>	0
<b>MOM / OPQ</b>	1 / 100

