Spec Sheet SELB4FTEM3














LED Batten

4ft 23W 4200K LED Batten with Self Test **Emergency**

DESCRIPTION

4ft LED highly efficient traditional style batten fixture, slim profile design with even light distribution, front diffuser and end caps removable to allow for easy wiring at either end of the batten or Besa mounting from the rear of the fitting, comes complete with a bolt on self-test emergency downlight attached at the end of the fitting

FEATURES

- Full photometric data available to enable lighting designs. Light output is equivalent or superior to traditional fluorescent battens.
- Pressed steel body and polycarbonate diffuser. LED tray can be removed from the housing for easy installation
- BESA box mounting, gear tray retaining straps & push terminal connections
- · 20mm knockout glands at each end for through wiring options
- · Minimum 3 hour functionality in emergency mode
- 118 lumens in emergency mode
- >120 lm/W
- Replacement battery code: EB2

GENERAL INFORMATION			
Light Source	LED	Colour / Finish	write
Application	Internal	Mounting Type	Surface
Product Warranty	5 Years	Battery Warranty	1 Year
Net Weight	1.67 kg		

TECHNICAL INFORMATION			
Nominal Voltage	240 V	Frequency	50Hz
Class Protection	1	Operating Temperature (Min)	-20 °C
Operating Temperature (Max)	45 °C	Average Rated Life	35,000 h
Number of switching cycles	15,000	Construction Materials Line 1	Steel
Construction Materials Line 2	Polycarbonate	Dimensions - Height	73 mm
Dimensions - Width	60 mm	Dimensions - Depth	1170 mm

PRODUCT INFORMATION			
Wattage Combined	23W	CCT Combined	4200K
Luminaire Lumens Combined	2930 lm	lm/W Combined	127 lm/w
Beam Angle	120°	CRI	80
SDCM	<6	Lumen Maintenance	0.7
IP Rating	IP20	Emergency Lumen Output	118 lm












мом / оро

1/1



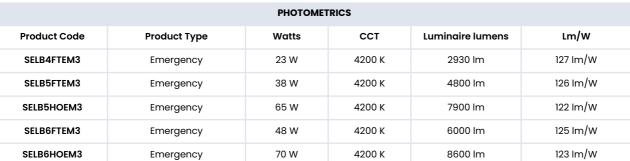

SELD4F I EIVIS	Emergency	23 W	4200 K	2930 1111	127 1111/ VV
SELB5FTEM3	Emergency	38 W	4200 K	4800 lm	126 lm/W
SELB5HOEM3	Emergency	65 W	4200 K	7900 lm	122 lm/W
SELB6FTEM3	Emergency	48 W	4200 K	6000 lm	125 lm/W
SELB6HOEM3	Emergency	70 W	4200 K	8600 lm	123 lm/W
ACCESSORIES					

PACKAGING		
Packaging Type	Plain Box	
Individual unit gross weight	1,835 g	
Pallet Qty	0	
MOM / OPQ	1/1	

Ni-Cd 3.6V 2000mAh Stick Battery

Description











Product Code

EB2