
## **Spec Sheet SELB5HOEM3**











## **LED Batten**

5ft 65W 4200K High Output LED Batten with Self Test Emergency

## DESCRIPTION

5ft LED highly efficient traditional style batten fixture, slim profile design with even light distribution, front diffuser and end caps removable to allow for easy wiring at either end of the batten or Besa mounting from the rear of the fitting, available in both standard and high output mode to suit different ceiling heights and task requirements, comes complete with a bolt on self-test emergency downlight attached at the end of the fitting

## **FEATURES**

- · Full photometric data available to enable lighting designs. Light output is equivalent or superior to traditional fluorescent battens.
- Pressed steel body and polycarbonate diffuser. LED tray can be removed from the housing for easy installation
- BESA box mounting, gear tray retaining straps & push terminal connections
- 20mm knockout glands at each end for through wiring options
- · Minimum 3 hour functionality in emergency mode
- 118 lumens in emergency mode
- >120 lm/W
- Replacement battery code: EB2

Replacement batter, court but				
GENERAL INFORMATION				
Light Source	LED	Colour / Finish	White	
Application	Internal	Mounting Type	Surface	
Product Warranty	5 Years	Battery Warranty	1 Year	
Net Weight	2.09 kg			

TECHNICAL INFORMATION				
Nominal Voltage	240 V	Frequency	50Hz	
Class Protection	1	Operating Temperature (Min)	-20 °C	
Operating Temperature (Max)	45 °C	Average Rated Life	35,000 h	
Number of switching cycles	15,000	Construction Materials Line 1	Steel	
Construction Materials Line 2	Polycarbonate	Dimensions - Height	73 mm	
Dimensions - Width	60 mm	Dimensions - Depth	1460 mm	

PRODUCT INFORMATION				
Wattage Combined	65W	CCT Combined	4200K	
Luminaire Lumens Combined	7900 lm	Im/W Combined	122 lm/w	
Beam Angle	120°	CRI	80	
SDCM	<6	Lumen Maintenance	0.7	
IP Rating	IP20	Emergency Lumen Output	118 lm	














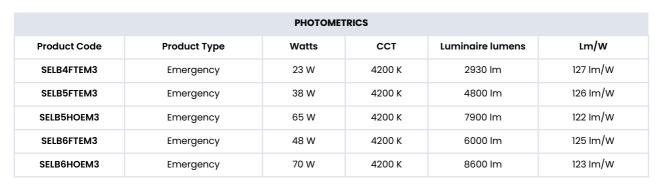

ACCESSORIES			
Product Code	Description	MOM / OPQ	
EB2	Ni-Cd 3.6V 2000mAh Stick Battery	1/1	

PACKAGING		
Packaging Type	Plain Box	
Individual unit gross weight	2,278 g	
Pallet Qty	0	
MOM / OPQ	1/1	







