



## Slim Wallpack


Slim black IP65 wall pack 17W CCT selectable

### DESCRIPTION

Slim profile and durable wall pack, available with colour temperature selection to suit different applications. The design offers a contemporary slimmer update to the traditional wall pack available with further energy savings with an option of an integrated photocell

### FEATURES

- Colour temperature selectable 3000K, 4000K, 6000K
- Up to 90 lm/W
- ABS base and polycarbonate diffuser
- Slim design
- Opal diffuser, evenly diffused light output
- 20mm cable entries on either side and one to the rear

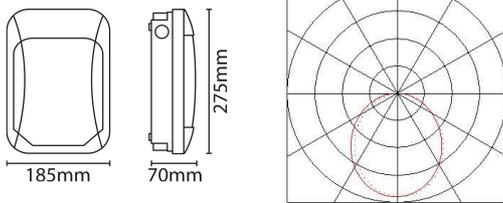

### GENERAL INFORMATION

Light Source	LED	Colour / Finish	Black
Application	External	Mounting Type	Surface
Product Warranty	5 Years	Net Weight	0.6 kg
Energy Efficiency Class	E		

### TECHNICAL INFORMATION

Nominal Voltage	240	Frequency	50Hz
Class Protection	2	Operating Temperature (Min)	-20 °C
Operating Temperature (Max)	45 °C	Average Rated Life	50,000 h
Number of switching cycles	25,000	Construction Materials Line 1	Polycarbonate
Construction Materials Line 2	ABS	Dimensions - Height	275 mm
Dimensions - Width	185 mm	Dimensions - Depth	70 mm
IK Rating	IK10	IP Rating	IP65

### PRODUCT INFORMATION

Wattage Combined	17W	CCT Combined	3000K / 4000K / 6000K
Luminaire Lumens Combined	1580 - 1595 lm	lm/W Combined	93 - 94 lm/w
Beam Angle	120°	CRI	80
SDCM	<6	Lumen Maintenance	0.8



Lighting Technology used	LED	Non-Directional or Directional	NDLS
Mains or non-mains	MLS	Connected light source (CLS)	FALSE
Colour tuneable light source	FALSE	High Luminance light source	FALSE
Anti Glare shield	FALSE	Dimmable	Not Dimmable
Correlated Colour temperature type	STEPS	Correlated Colour temperature (K) 1	3,000
Correlated Colour temperature (K) 2	4,000	Correlated Colour temperature (K) 3	6,000
Chromaticity coordinates x	0.434	Chromaticity coordinates y	0.405
Stroboscopic effect metric (SVM)	0.0	Flicker Metric (pst)	0.5
R9 colour rendering index	10.0	Survival factor @6000hrs	0.9
Claim LED Replace Fluorescent	FALSE	Spectrum report available	Yes
Displacement Factor	0.92	CCT1/WATT1: Rated Peak Intensity	385 cd
CCT2/WATT1: Rated Peak Intensity	412 cd	CCT3/WATT1: Rated Peak Intensity	394 cd



IP65



IK10



Colour Temp.  
Selectable



PHOTOMETRICS					
Product Code	Product Type	Watts	CCT	Luminaire lumens	Lm/W
WPCSBK	Standard, Black	17	3000 K	1580 lm	93 lm/W
			4000 K	1645 lm	97 lm/W
			6000 K	1,595	94 lm/W
WPCSBKPC	Photocell, Black	17	3000 K	1580 lm	93 lm/W
			4000 K	1645 lm	97 lm/W
			6000 K	1,595	94 lm/W
WPCSWH	White	17	3000 K	1580 lm	93 lm/W
			4000 K	1645 lm	97 lm/W
			6000 K	1,595	94 lm/W
WPCSWHPC	Photocell, White	17	3000 K	1580 lm	93 lm/W
			4000 K	1645 lm	97 lm/W
			6000 K	1,595	94 lm/W

PACKAGING	
Packaging Type	Plain Box
Individual unit gross weight	686 g
Pallet Layer Qty	100
Pallet Layers	3
Pallet Qty	300
MOM / OPQ	1 / 20



IP65



IK10



Colour Temp.  
Selectable

