


DURABAL BK

External Corner For The DURABAL BK Balcony Angle Profile With Drip Sill

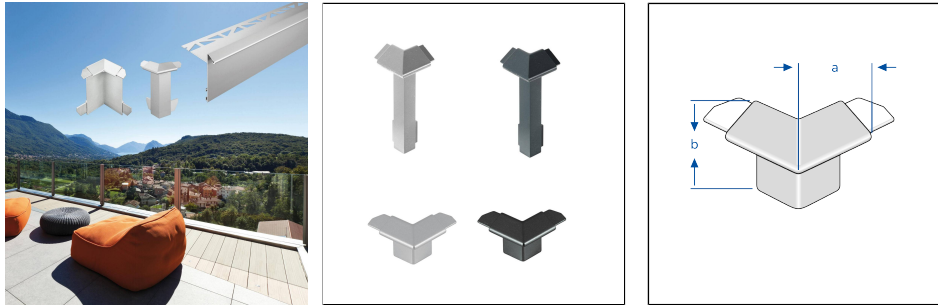

TECHNICAL DIMENSIONS AND PRODUCT VARIANTS

Material	Aluminium
Surface	powder coated, anodised
Colour	silver, anthracite, anthracite grey (RAL 7016)
Height (b)	22 mm
dimension	Innenmaß 23 x 23 mm, Innenmaß 17 x 17 mm

MATERIAL

Aluminium can be used wherever a medium mechanical stresses are expected. Contact with alkaline materials (e.g. tile adhesive) can lead to discolouration, which can be difficult to remove afterwards. High humidity during the drying phase can intensify this process. Always wipe off tile adhesive or grout on visible surfaces immediately with plenty of water, then wipe dry and ensure that the room is well ventilated.

Suitability in terms of mechanical and chemical resistance must always be checked on a case-by-case basis.

CARE

Aluminium does not require any special care. If necessary, it can simply be damp-cleaned with clear, clean water and a few drops of washing-up liquid. Then wipe dry.

Acidic, alkaline and abrasive cleaning agents should be avoided.

PROCESSING

1. Select and customise the profile according to the desired covering and installation height.
2. Apply tile adhesive to the substrate (concrete slab or dry screed) using a notched trowel.
3. Press the profile into the adhesive bed and align it in height and alignment.
4. If necessary, use suitable external and internal corners. Use the connectors available as accessories to connect several profiles.
5. Cover the entire area of the mounting leg with adhesive.
6. Press the covering firmly into place and align it so that it is flush with the upper edge of the profile.
7. Leave a gap of 1-2 mm to the profile.

25 April 2025 03:24 PM

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



8. completely fill the space between the tiles and the profile with grout.

Protect visible surfaces from contact with tile adhesive or grout and, if necessary, clean immediately with a sponge and clean water. Then rub dry.

The generally recognised rules of technology must be observed. The suitability with regard to mechanical and chemical resistance must always be checked in each individual case.

PRODUCT VARIANTS

Ident	Height (b)	Surface	Colour
BKAE 220-60-XH	22 mm	anodised	silver
BKAC 22016-60-XH	22 mm	powder coated	anthracite
BKAE 60-XH/1		anodised	silver
BKAE-XH/1		anodised	silver
BKAE-XH/10		anodised	silver
BKAC 60-XH/1		powder coated	anthracite grey (RAL 7016)
BKAC-XH/1		powder coated	anthracite grey (RAL 7016)

25 April 2025 03:24 PM

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.

