



DURABAL BL Corner Piece For The Durabal BL Balcony Angle Profile



Valid from: 01/06/2025

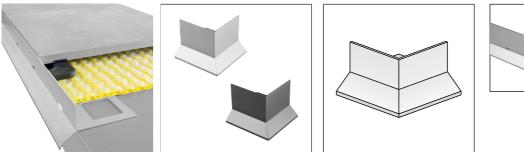



TECHNICAL DIMENSIONS AND PRODUCT VARIANTS

Material	Aluminium	
Surface	powder coated, anodised	
Colour	silver, anthracite grey (RAL 7016)	
Height	53 mm, 65 mm, 95 mm	
Width mm	100 mm	

MATERIAL

Aluminium can be used wherever a medium mechanical stresses are expected. Contact with alkaline materials (e.g. tile adhesive) can lead to discolouration, which can be difficult to remove afterwards. High humidity during the drying phase can intensify this process. Always wipe off tile adhesive or grout on visible surfaces immediately with plenty of water, then wipe dry and ensure that the room is well ventilated.

Suitability in terms of mechanical and chemical resistance must always be checked on a case-by-case basis.

CARE

Aluminium does not require any special care. If necessary, it can simply be damp-cleaned with clear, clean water and a few drops of washing-up liquid. Then wipe dry.

Acidic, alkaline and abrasive cleaning agents should be avoided.

PROCESSING

- 1. Select and adjust the profile according to the required installation height.
- 2. Place the profile on the substrate and check height and alignment.
- 3. Ensure that any water that enters through the holes in the legs can drain away.

4. If necessary, use suitable external corners; for internal corners, cut the profile on a mitre. To connect several profiles and corners, use the connectors available as accessories.

- 5. If necessary, screw the profile to the substrate using screws
- 6. Fill with drainage screed or gravel bed. Ensure that there is sufficient space for the covering up to the upper edge of the profile.
- 7. Lay the covering on the gravel bed or the dried drainage screed so that it is flush with the upper edge of the profile.

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.

DURAL GmbH | Südring 11 | D-56412 Ruppach-Goldhausen | Germany | +49 2602/9261-0 | info@dural.com

The recognised standards and regulations of technology must be observed. Previous data sheets are invalid.





The generally recognised rules of technology must be observed. The suitability with regard to mechanical and chemical resistance must always be checked in each individual case.

PRODUCT VARIANTS

Ident	Height	Surface	Colour
BLAE 530-X/1	53 mm	anodised	silver
BLAC 5316-X/1	53 mm	powder coated	anthracite grey (RAL 7016)
BLAE 650-X/1	65 mm	anodised	silver
BLAC 6516-X/1	65 mm	powder coated	anthracite grey (RAL 7016)
BLAE 950-X/1	95 mm	anodised	silver
BLAC 9516-X/1	95 mm	powder coated	anthracite grey (RAL 7016)

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.

DURAL GmbH | Südring 11 | D-56412 Ruppach-Goldhausen | Germany | +49 2602/9261-0 | info@dural.com