




DURABAL BL

Balcony Angle Profile For Gravel/ Stone Bed, Drainage Screed, Support Or Direct Installation

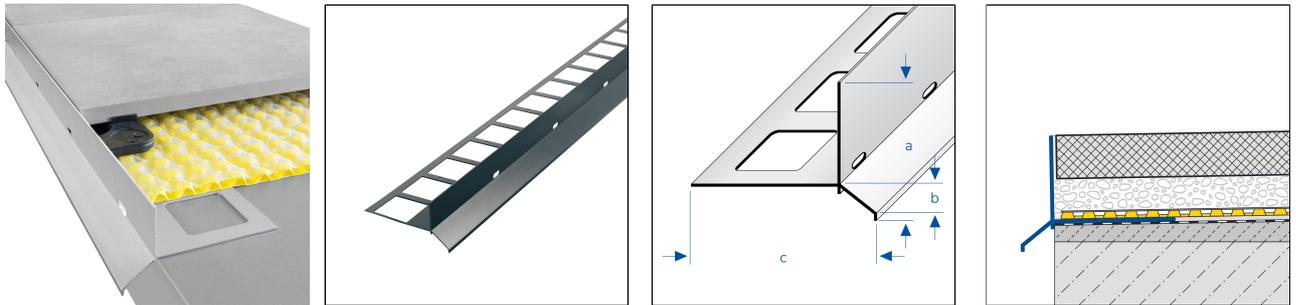

ACCESSORIES

Matching corner pieces and connectors are available as accessories.

MATERIAL

Aluminium can be used wherever medium mechanical stress is to be expected. Contact with alkaline materials (e.g. tile adhesive) can cause discolouration that is almost impossible to remove. High humidity during the drying phase can intensify this process. Always wipe off tile adhesive or grout from visible surfaces immediately with plenty of water, then wipe dry and ensure good room ventilation.

The suitability with regard to mechanical and chemical resistance must always be checked in each individual case.

CARE

Aluminium does not require any special care. If necessary, it can be cleaned with clear, clean water and a few drops of washing-up liquid. Then wipe dry.

Avoid using acidic and abrasive cleaning agents.

PROCESSING

1. Select and adjust the profile according to the required installation height.
2. Apply tile adhesive to the substrate (concrete slab or dry screed) using a notched trowel.
3. Press the profile into the adhesive bed and align it in height and alignment.
4. Use suitable external corners if required. Use the connectors available as accessories to connect several profiles and corners.
5. Fill the entire surface of the fixing flange with adhesive.
6. Press the covering firmly into place and align it so that it ends slightly above the profile edge (serves as a drip sill).

Protect visible surfaces from contact with tile adhesive or grout and clean immediately with a cloth and clear water if necessary. Then rub dry.

The generally accepted rules of technology and tiling must be observed. Suitability for use with mechanical and chemical resistance

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



must always be checked in each individual case.

TECHNICAL DIMENSIONS AND PRODUCT VARIANTS

Material	[Aluminium]
Surface	[powder coated], [anodised]
Colour	silver, anthracite grey (RAL 7016)
Length	300 cm
Height	53 mm, 65 mm, 95 mm
Width mm	100 mm
height 2	25

PRODUCT VARIANTS

Ident	Height	Surface	Colour	Length
BLAE 530/300	53 mm	anodised	silver	300 cm
BLAC 5316/300	53 mm	powder coated	anthracite grey (RAL 7016)	300 cm
BLAE 650/300	65 mm	anodised	silver	300 cm
BLAC 6516/300	65 mm	powder coated	anthracite grey (RAL 7016)	300 cm
BLAE 950/300	95 mm	anodised	silver	300 cm
BLAC 9516/300	95 mm	powder coated	anthracite grey (RAL 7016)	300 cm

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.