




DURABAL BL

Balcony Angle Profile For Gravel/ Stone Bed, Drainage Screed, Support Or Direct Installation

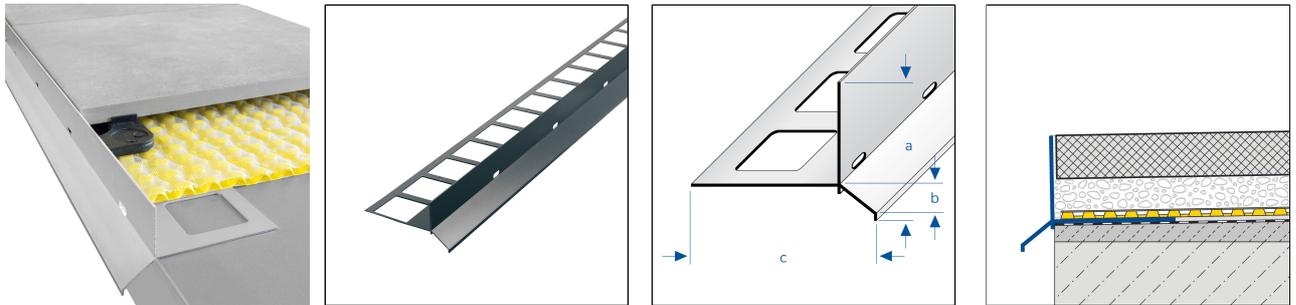

TECHNICAL DIMENSIONS AND PRODUCT VARIANTS

| | |
|------------|------------------------------------|
| Material | Aluminium |
| Surface | powder coated, anodised |
| Colour | silver, anthracite grey (RAL 7016) |
| Length | 300 cm |
| Height (b) | 53 mm, 65 mm, 95 mm |
| Width mm | 100 mm |

ACCESSORIES

Matching corner pieces and connectors are available as accessories.

MATERIAL

Aluminium can be used wherever a medium mechanical stresses are expected. Contact with alkaline materials (e.g. tile adhesive) can lead to discolouration, which can be difficult to remove afterwards. High humidity during the drying phase can intensify this process. Always wipe off tile adhesive or grout on visible surfaces immediately with plenty of water, then wipe dry and ensure that the room is well ventilated.

Suitability in terms of mechanical and chemical resistance must always be checked on a case-by-case basis.

CARE

Aluminium does not require any special care. If necessary, it can simply be damp-cleaned with clear, clean water and a few drops of washing-up liquid. Then wipe dry.

Acidic, alkaline and abrasive cleaning agents should be avoided.

PROCESSING

1. Select and adjust the profile according to the required installation height.
2. Place the profile on the substrate and check height and alignment.
3. Ensure that any water that enters through the holes in the legs can drain away.
4. If necessary, use suitable external corners; for internal corners, cut the profile on a mitre. To connect several profiles and corners, use the connectors available as accessories.

09 May 2025 05:35 AM

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



5. If necessary, screw the profile to the substrate using screws
6. Fill with drainage screed or gravel bed. Ensure that there is sufficient space for the covering up to the upper edge of the profile.
7. Lay the covering on the gravel bed or the dried drainage screed so that it is flush with the upper edge of the profile.

The generally recognised rules of technology must be observed. The suitability with regard to mechanical and chemical resistance must always be checked in each individual case.

PRODUCT VARIANTS

| Ident | Height (b) | Surface | Colour | Length |
|---------------|------------|---------------|----------------------------|--------|
| BLAE 530/300 | 53 mm | anodised | silver | 300 cm |
| BLAC 5316/300 | 53 mm | powder coated | anthracite grey (RAL 7016) | 300 cm |
| BLAE 650/300 | 65 mm | anodised | silver | 300 cm |
| BLAC 6516/300 | 65 mm | powder coated | anthracite grey (RAL 7016) | 300 cm |
| BLAE 950/300 | 95 mm | anodised | silver | 300 cm |
| BLAC 9516/300 | 95 mm | powder coated | anthracite grey (RAL 7016) | 300 cm |

09 May 2025 05:35 AM

Please note: For technical reasons, tolerances in color effects of the materials and print are possible.
All information is based on the best of our knowledge and belief. No guarantee can be derived from this.
We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.