


V-SHOWER flex / TI-DRAIN plus

Fire Protection Sleeve For Vertical Floor Drains

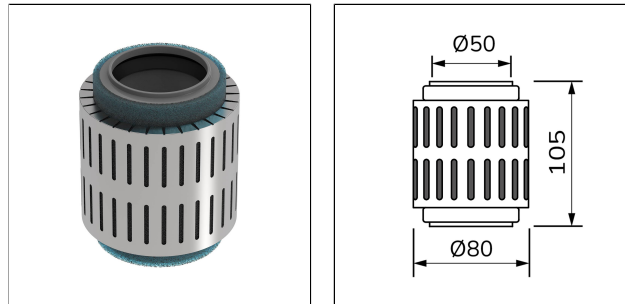

PROPERTIES

Fire resistance rating of up to 90 minutes
Direct installation under the drain via plug connection
Highly fire-resistant DN 50 partition
Solid ceilings from 150 to 325 mm ceiling thickness
Fire and smoke resistant
Fire resistance class "R90" according to DIN 4102-11

MATERIAL

Fire protection sleeve
PP HT sleeve DN 50

PROCESSING

1. Drill a hole with a diameter of 130 mm through the ceiling.
2. Push the ø 50 mm pipe through the hole in the ceiling until it comes out.
3. Insert the pipe and drain into the fire protection sleeve.
4. Connect the drain to the channel and place it in the desired position.
5. Fill the empty space around the fire protection sleeve with fire protection mortar.

The generally accepted rules of technology and tiling must be observed. Suitability for use with mechanical and chemical resistance must always be checked in each individual case.

Please note: For technical reasons, tolerances in color effects of the materials and print are possible.
All information is based on the best of our knowledge and belief. No guarantee can be derived from this.
We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



TECHNICAL DIMENSIONS AND PRODUCT VARIANTS

Material	[Polypropylene]
----------	-----------------

PRODUCT VARIANTS

Ident
BSM-VSF-TDP

Please note: For technical reasons, tolerances in color effects of the materials and print are possible.
All information is based on the best of our knowledge and belief. No guarantee can be derived from this.
We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.