




DURABAL BW

L-Shaped Balcony Angle Profile For Thin-Bed Installation

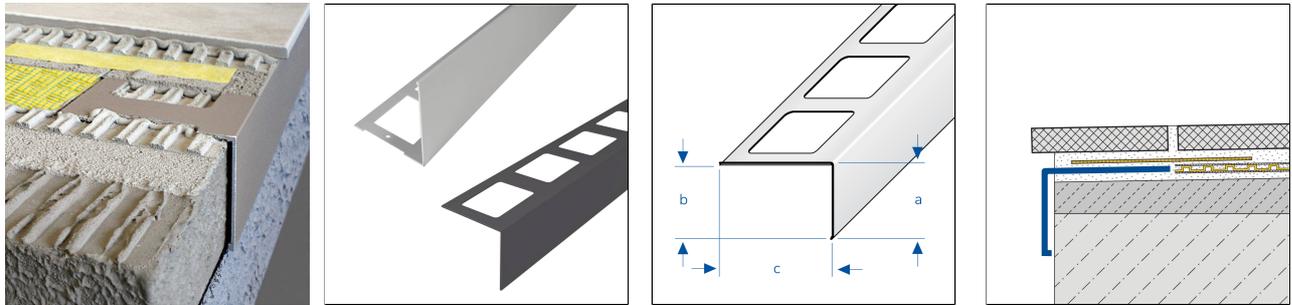

ACCESSORIES

Matching corner pieces and connectors are available as accessories.

MATERIAL

Aluminium can be used wherever medium mechanical stress is expected. Contact with alkaline materials (e.g. tile adhesive) can cause discolouration that is difficult to remove. High humidity during the drying phase can intensify this process. Always wipe tile adhesive or grout off visible surfaces immediately with plenty of water and then wipe dry.

Stainless steel V2A/304 is particularly suitable for applications subject to high mechanical stress. Contact with products containing hydrochloric acid must be avoided. Do not use tools made of unalloyed steel during processing. Open cut edges are not rust-resistant. If necessary, separate rust protection should be applied. Even with stainless steel, flash rust is possible depending on the environmental conditions and should be removed immediately.

The suitability of the material with regard to mechanical and chemical resistance must always be checked on a case-by-case basis. The suitability for mechanical and chemical stress must always be checked on a case-by-case basis.

CARE

Aluminium does not require any special care. If necessary, it can be cleaned with clear, clean water and a few drops of washing-up liquid. Then wipe dry. Avoid using acidic, alkaline or abrasive cleaning agents.

Stainless steel (304) does not require any special care. If necessary, it can be cleaned with clear, clean water and a few drops of washing-up liquid. Then wipe dry. Avoid using acidic, alkaline or abrasive cleaning agents. Flash rust can be removed with commercially available polishes suitable for stainless steel.

PROCESSING

1. Select and adjust the profile according to the required installation height.
2. Apply tile adhesive to the substrate (concrete slab or dry screed) using a notched trowel.
3. Press the profile into the adhesive bed and align it in height and alignment.
4. Use suitable external corners if required. Use the connectors available as accessories to connect several profiles and corners.
5. Fill the entire surface of the fixing flange with adhesive.
6. Press the covering firmly into place and align it so that it ends slightly above the profile edge (serves as a drip sill).

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



Protect visible surfaces from contact with tile adhesive or grout and clean immediately with a cloth and clear water if necessary. Then rub dry.

The generally accepted rules of technology and tiling must be observed. Suitability for use with mechanical and chemical resistance must always be checked in each individual case.

TECHNICAL DIMENSIONS AND PRODUCT VARIANTS

Material	[Aluminium], [Stainless Steel (304)]
Surface	[powder coated], [anodised], [natural]
Colour	silver, anthracite grey (RAL 7016)
Length	300 cm
Height	55 mm, 75 mm, 95 mm
Width mm	80 mm

PRODUCT VARIANTS

Ident	Height	Surface	Colour	Length
BWAE 550/300	55 mm	anodised	silver	300 cm
BWE 55/300	55 mm	natural	silver	300 cm
BWAC 5516/300	55 mm	powder coated	anthracite grey (RAL 7016)	300 cm
BWAE 750/300	75 mm	anodised	silver	300 cm
BWE 75/300	75 mm	natural	silver	300 cm
BWAC 7516/300	75 mm	powder coated	anthracite grey (RAL 7016)	300 cm
BWAE 950/300	95 mm	anodised	silver	300 cm
BWE 95/300	95 mm	natural	silver	300 cm
BWAC 9516/300	95 mm	powder coated	anthracite grey (RAL 7016)	300 cm

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.