




DURONDELL Aluminium

Aluminium Round Edge Trims

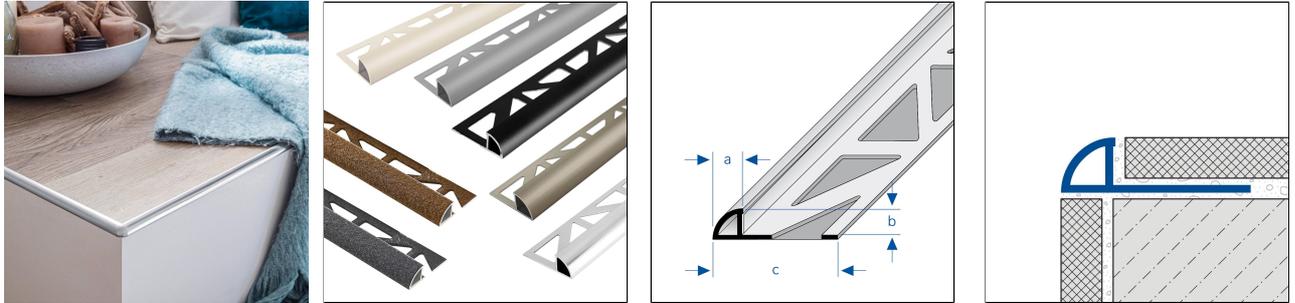

ACCESSORIES

Matching corner pieces are available as accessories.

MATERIAL

Aluminium can be used wherever a medium mechanical stresses are expected. Contact with alkaline materials (e.g. tile adhesive) can lead to discolouration, which can be difficult to remove afterwards. High humidity during the drying phase can intensify this process. Always wipe off tile adhesive or grout on visible surfaces immediately with plenty of water, then wipe dry and ensure that the room is well ventilated.

Suitability in terms of mechanical and chemical resistance must always be checked on a case-by-case basis.

CARE

Aluminium does not require any special care. If necessary, it can simply be damp-cleaned with clear, clean water and a few drops of washing-up liquid. Then wipe dry.

Acidic, alkaline and abrasive cleaning agents should be avoided.

PROCESSING

1. Select the profile according to the tile thickness.
2. Apply tile adhesive with a notched trowel.
3. Press the profile into the adhesive bed and align.
4. Fill over the entire surface of the fixing leg.
5. Press the tiles firmly into place and align them so that they are flush with the upper edge of the profile. Lay the tiles fully flush.
6. Use suitable inner or outer corner pieces.
7. Leave a grout line of 1-2 mm to the profile.
8. Fill the space between the tiles and the profile completely with grout.

Protect visible surfaces from contact with tile adhesive or grout and, if necessary, clean immediately with a cloth and clean water. Then wipe dry.

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



The generally recognised rules of technology must be observed. Suitability in terms of mechanical and chemical resistance must always be checked on a case-by-case basis.

TECHNICAL DIMENSIONS AND PRODUCT VARIANTS

Material	[Aluminium]
Surface	[high-gloss anodised], [tactile coated], [anodised], [brushed],[high-gloss anodised]
Colour	titanium, beige, anthracite, brown, silver, gold
Length	250 cm, 300 cm
sight width	7.5 mm, 9.5 mm, 12.5 mm, 11.5 mm, 14 mm
Height	12.5 mm, 6 mm, 8 mm, 10 mm, 11 mm

PRODUCT VARIANTS

Ident	Height	Surface	Colour	Length
DRAE 60/250	6 mm	anodised	silver	250 cm
DRAE 60/300	6 mm	anodised	silver	300 cm
DRA 662/250	6 mm	high-gloss anodised	silver	250 cm
DRA 662/300	6 mm	high-gloss anodised	silver	300 cm
DRACS 633/250	6 mm	tactile coated	anthracite	250 cm
DRACS 632/250	6 mm	tactile coated	beige	250 cm
DRACS 635/250	6 mm	tactile coated	brown	250 cm
DRAE 80/250	8 mm	anodised	silver	250 cm
DRAE 80/300	8 mm	anodised	silver	300 cm
DRAE 80-T/250	8 mm	anodised	titanium	250 cm
DRA 862-SF/250	8 mm	brushed, high-gloss anodised	silver	250 cm
DRA 862-SF/300	8 mm	brushed, high-gloss anodised	silver	300 cm
DRA 863-SF/250	8 mm	brushed, high-gloss anodised	titanium	250 cm
DRA 862/250	8 mm	high-gloss anodised	silver	250 cm
DRA 862/300	8 mm	high-gloss anodised	silver	300 cm
DRACS 833/250	8 mm	tactile coated	anthracite	250 cm
DRACS 832/250	8 mm	tactile coated	beige	250 cm
DRACS 835/250	8 mm	tactile coated	brown	250 cm

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



DRAE 100-G/250	10 mm	anodised	gold	250 cm
DRAE 100/250	10 mm	anodised	silver	250 cm
DRAE 100/300	10 mm	anodised	silver	300 cm
DRAE 100-T/250	10 mm	anodised	titanium	250 cm
DRA 1062-SF/250	10 mm	brushed, high-gloss anodised	silver	250 cm
DRA 1062-SF/300	10 mm	brushed, high-gloss anodised	silver	300 cm
DRA 1063-SF/250	10 mm	brushed, high-gloss anodised	titanium	250 cm
DRA 1061/250	10 mm	high-gloss anodised	gold	250 cm
DRA 1062/250	10 mm	high-gloss anodised	silver	250 cm
DRA 1062/300	10 mm	high-gloss anodised	silver	300 cm
DRACS 1033/250	10 mm	tactile coated	anthracite	250 cm
DRACS 1032/250	10 mm	tactile coated	beige	250 cm
DRACS 1035/250	10 mm	tactile coated	brown	250 cm
DRAE 110/250	11 mm	anodised	silver	250 cm
DRACS 1133/250	11 mm	tactile coated	anthracite	250 cm
DRACS 1132/250	11 mm	tactile coated	beige	250 cm
DRACS 1135/250	11 mm	tactile coated	brown	250 cm
DRAE 125/250	12.5 mm	anodised	silver	250 cm
DRAE 125/300	12.5 mm	anodised	silver	300 cm
DRAE 125-T/250	12.5 mm	anodised	titanium	250 cm
DRA 1262-SF/250	12.5 mm	brushed, high-gloss anodised	silver	250 cm
DRA 1262-SF/300	12.5 mm	brushed, high-gloss anodised	silver	300 cm
DRA 1263-SF/250	12.5 mm	brushed, high-gloss anodised	titanium	250 cm
DRA 1262/250	12.5 mm	high-gloss anodised	silver	250 cm
DRACS 1233/250	12.5 mm	tactile coated	anthracite	250 cm
DRACS 1232/250	12.5 mm	tactile coated	beige	250 cm
DRACS 1235/250	12.5 mm	tactile coated	brown	250 cm
DRA 863/250		high-gloss anodised	titanium	
DRA 1063/250		high-gloss anodised	titanium	

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.