


DUROSOL Aluminium

L-Shaped Edge Trim Profile Made Of Aluminium



Valid from: 01/06/2025

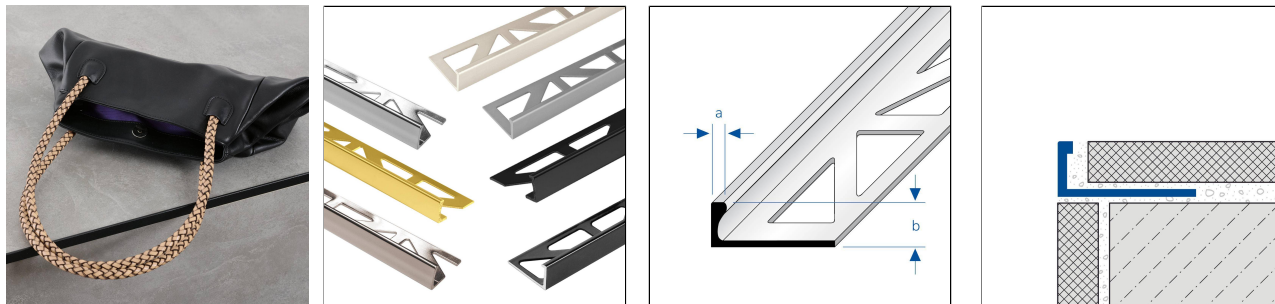

TECHNICAL DIMENSIONS AND PRODUCT VARIANTS

Material	[Aluminium]
Surface	[anodised],[brushed], [untreated], [high-gloss anodised], [brushed],[high-gloss anodised], [anodised]
Colour	silver, natural, titanium, gold
Length	100 cm, 250 cm, 300 cm
sight width	3 mm
Height	12.5 mm, 2 mm, 3 mm, 16.5 mm, 18.5 mm, 6 mm, 8 mm, 9 mm, 10 mm, 11 mm, 4.5 mm, 15 mm, 20 mm, 22 mm, 25 mm, 30 mm
Width mm	44 mm

ACCESSORIES

Matching corner pieces are available as accessories.

MATERIAL

Aluminium can be used wherever a medium mechanical stresses are expected. Contact with alkaline materials (e.g. tile adhesive) can lead to discolouration, which can be difficult to remove afterwards. High humidity during the drying phase can intensify this process. Always wipe off tile adhesive or grout on visible surfaces immediately with plenty of water, then wipe dry and ensure that the room is well ventilated.

Suitability in terms of mechanical and chemical resistance must always be checked on a case-by-case basis.

CARE

Aluminium does not require any special care. If necessary, it can simply be damp-cleaned with clear, clean water and a few drops of washing-up liquid. Then wipe dry.

Acidic, alkaline and abrasive cleaning agents should be avoided.

PROCESSING

1. Select the profile according to the tile thickness.
2. Apply tile adhesive with a notched trowel.
3. Press the profile into the adhesive bed and align.

Please note: For technical reasons, tolerances in color effects of the materials and print are possible.
All information is based on the best of our knowledge and belief. No guarantee can be derived from this.
We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



4. Fill over the entire surface of the fixing leg.
5. Press the tiles firmly into place and align them so that they are flush with the upper edge of the profile. Lay the tiles fully flush.
- 6 Use suitable inner or outer corner pieces.
7. Leave a grout line of 1-2 mm to the profile.
8. Fill the space between the tiles and the profile completely with grout.

Protect visible surfaces from contact with tile adhesive or grout and, if necessary, clean immediately with a cloth and clean water. Then wipe dry.

The generally recognised rules of technology must be observed. Suitability in terms of mechanical and chemical resistance must always be checked on a case-by-case basis.

PRODUCT VARIANTS

Ident	Height	Surface	Colour	Length
DSAE 20/250	2 mm	anodised	silver	250 cm
DSA 20/250	2 mm	untreated	natural	250 cm
DSAE 30-G/250	3 mm	anodised	gold	250 cm
DSAE 30/250	3 mm	anodised	silver	250 cm
DSA 30/250	3 mm	untreated	natural	250 cm
DSAE 45-G/250	4.5 mm	anodised	gold	250 cm
DSAE 45/250	4.5 mm	anodised	silver	250 cm
DSA 45/250	4.5 mm	untreated	natural	250 cm
DSAE 60-G/250	6 mm	anodised	gold	250 cm
DSAE 60/100	6 mm	anodised	silver	100 cm
DSAE 60/250	6 mm	anodised	silver	250 cm
DSA 662/250	6 mm	high-gloss anodised	silver	250 cm
DSA 60/100	6 mm	untreated	natural	100 cm
DSA 60/250	6 mm	untreated	natural	250 cm
DSAE 80-G/250	8 mm	anodised	gold	250 cm
DSAE 80/100	8 mm	anodised	silver	100 cm
DSAE 80/250	8 mm	anodised	silver	250 cm
DSAE 80/300	8 mm	anodised	silver	300 cm
DSAE 80-T/250	8 mm	anodised	titanium	250 cm
DSAE 80-SF/250	8 mm	anodised, brushed	silver	250 cm
DSA 862-SF/250	8 mm	brushed, high-gloss anodised	silver	250 cm
DSA 863-SF/250	8 mm	brushed, high-gloss anodised	titanium	250 cm
DSA 861/250	8 mm	high-gloss anodised	gold	250 cm
DSA 862/250	8 mm	high-gloss anodised	silver	250 cm
DSA 863/250	8 mm	high-gloss anodised	titanium	250 cm
DSA 80/100	8 mm	untreated	natural	100 cm
DSA 80/250	8 mm	untreated	natural	250 cm

Please note: For technical reasons, tolerances in color effects of the materials and print are possible.
All information is based on the best of our knowledge and belief. No guarantee can be derived from this.
We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.

DSA 80/300	8 mm	untreated	natural	300 cm
DSAE 90-G/250	9 mm	anodised	gold	250 cm
DSAE 90/100	9 mm	anodised	silver	100 cm
DSAE 90/250	9 mm	anodised	silver	250 cm
DSAE 90/300	9 mm	anodised	silver	300 cm
DSA 90/100	9 mm	untreated	natural	100 cm
DSA 90/250	9 mm	untreated	natural	250 cm
DSA 90/300	9 mm	untreated	natural	300 cm
DSAE 100-G/250	10 mm	anodised	gold	250 cm
DSAE 100/100	10 mm	anodised	silver	100 cm
DSAE 100/250	10 mm	anodised	silver	250 cm
DSAE 100-L/250	10 mm	anodised	silver	250 cm
DSAE 100/300	10 mm	anodised	silver	300 cm
DSAE 100-T/250	10 mm	anodised	titanium	250 cm
DSAE 100-SF/250	10 mm	anodised, brushed	silver	250 cm
DSA 1062-SF/250	10 mm	brushed, high-gloss anodised	silver	250 cm
DSA 1063-SF/250	10 mm	brushed, high-gloss anodised	titanium	250 cm
DSA 1061/250	10 mm	high-gloss anodised	gold	250 cm
DSA 1062/250	10 mm	high-gloss anodised	silver	250 cm
DSA 1063/250	10 mm	high-gloss anodised	titanium	250 cm
DSA 100/100	10 mm	untreated	natural	100 cm
DSA 100/250	10 mm	untreated	natural	250 cm
DSA 100/300	10 mm	untreated	natural	300 cm
DSAE 110-G/250	11 mm	anodised	gold	250 cm
DSAE 110/100	11 mm	anodised	silver	100 cm
DSAE 110/250	11 mm	anodised	silver	250 cm
DSAE 110/300	11 mm	anodised	silver	300 cm
DSA 1161/250	11 mm	high-gloss anodised	gold	250 cm
DSA 110/100	11 mm	untreated	natural	100 cm
DSA 110/250	11 mm	untreated	natural	250 cm
DSA 110/300	11 mm	untreated	natural	300 cm
DSAE 125-G/250	12.5 mm	anodised	gold	250 cm
DSAE 125/100	12.5 mm	anodised	silver	100 cm
DSAE 125/250	12.5 mm	anodised	silver	250 cm
DSAE 125/300	12.5 mm	anodised	silver	300 cm
DSAE 125-T/250	12.5 mm	anodised	titanium	250 cm
DSAE 125-SF/250	12.5 mm	anodised, brushed	silver	250 cm
DSA 1262-SF/250	12.5 mm	brushed, high-gloss anodised	silver	250 cm

Please note: For technical reasons, tolerances in color effects of the materials and print are possible.
 All information is based on the best of our knowledge and belief. No guarantee can be derived from this.
 We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



DSA 1263-SF/250	12.5 mm	brushed, high-gloss anodised	titanium	250 cm
DSA 1261/250	12.5 mm	high-gloss anodised	gold	250 cm
DSA 1262/250	12.5 mm	high-gloss anodised	silver	250 cm
DSA 1263/250	12.5 mm	high-gloss anodised	titanium	250 cm
DSA 125/100	12.5 mm	untreated	natural	100 cm
DSA 125/250	12.5 mm	untreated	natural	250 cm
DSA 125/300	12.5 mm	untreated	natural	300 cm
DSAE 150-G/250	15 mm	anodised	gold	250 cm
DSAE 150/100	15 mm	anodised	silver	100 cm
DSAE 150/250	15 mm	anodised	silver	250 cm
DSAE 150/300	15 mm	anodised	silver	300 cm
DSA 150/100	15 mm	untreated	natural	100 cm
DSA 150/250	15 mm	untreated	natural	250 cm
DSA 150/300	15 mm	untreated	natural	300 cm
DSA 165/250	16.5 mm	untreated	natural	250 cm
DSA 185/250	18.5 mm	untreated	natural	250 cm
DSA 200/250	20 mm	untreated	natural	250 cm
DSAE 220/250	22 mm	anodised	silver	250 cm
DSA 220/250	22 mm	untreated	natural	250 cm
DSA 250/250	25 mm	untreated	natural	250 cm
DSA 300/250	30 mm	untreated	natural	250 cm

Please note: For technical reasons, tolerances in color effects of the materials and print are possible.
All information is based on the best of our knowledge and belief. No guarantee can be derived from this.
We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.