




DUROSOL Stainless steel (304)

L-Shaped Edge Trim Profile Made Of Stainless Steel

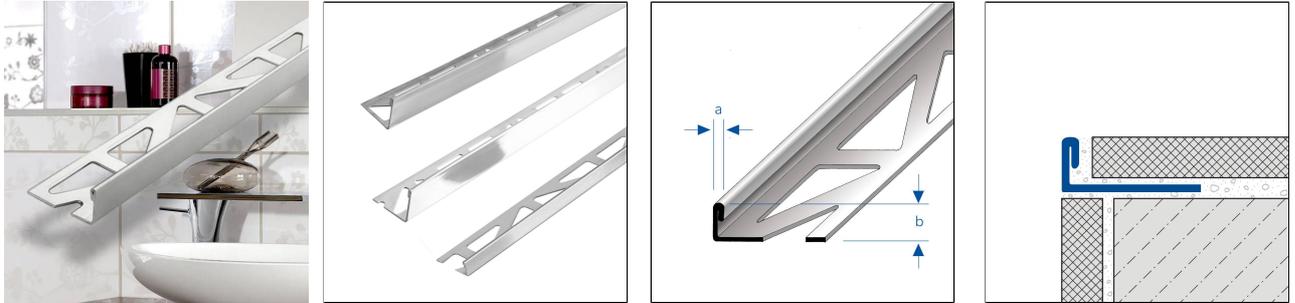

MATERIAL

Stainless steel (V2A/304) is particularly suitable for areas of application subject to high mechanical stresses and where particularly high demands are placed on cleanliness, hygiene and chemical resistance. Contact with products containing hydrochloric acid should be avoided.

Tools made of unalloyed steel must not be used during processing. Open cut edges are not rust-resistant. If necessary, separate rust protection must be applied to cut-edges.

Depending on the environmental conditions, rust film may also form on stainless steel and should be removed immediately.

The usability in terms of mechanical and chemical resistance must always be checked on a case-by-case basis.

CARE

Stainless steel (V2A/304) does not require any special care. If necessary, it can simply be cleaned with clear, clean water and a few drops of washing-up liquid. Then wipe dry.

Acidic, alkaline and abrasive cleaning agents should be avoided. Flash rust can be removed with commercially available polishes suitable for stainless steel.

PROCESSING

1. Select the profile according to the tile thickness.
2. Apply tile adhesive with a notched trowel.
3. Press the profile into the adhesive bed and align.
4. Fill over the entire surface of the fixing leg.
5. Press the tiles firmly into place and align them so that they are flush with the upper edge of the profile. Lay the tiles fully flush.
6. Use suitable inner or outer corner pieces.
7. Leave a grout line of 1-2 mm to the profile.
8. Fill the space between the tiles and the profile completely with grout.

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



Protect visible surfaces from contact with tile adhesive or grout and, if necessary, clean immediately with a cloth and clean water. Then wipe dry.

The generally recognised rules of technology must be observed. Suitability in terms of mechanical and chemical resistance must always be checked on a case-by-case basis.

TECHNICAL DIMENSIONS AND PRODUCT VARIANTS

Material	[Stainless Steel (304)], [Stainless Steel (316L)]
Surface	[brushed], [natural], [high-gloss polished]
Colour	natural
Length	100 cm, 250 cm, 300 cm
sight width	2.2 mm
Height	2 mm, 3 mm, 12.5 mm, 6 mm, 7 mm, 16.5 mm, 8 mm, 17.5 mm, 9 mm, 10 mm, 11 mm, 14 mm, 15 mm, 4.5 mm, 17 mm, 20 mm, 22 mm, 25 mm, 30 mm

PRODUCT VARIANTS

Ident	Height	Surface	Colour	Length
DSE 20/250	2 mm	natural	natural	250 cm
DSE 30-SP/250	3 mm	high-gloss polished	natural	250 cm
DSE 30/250	3 mm	natural	natural	250 cm
DSE 45-SP/250	4.5 mm	high-gloss polished	natural	250 cm
DSE 45/250	4.5 mm	natural	natural	250 cm
DSE 60-SF/250	6 mm	brushed	natural	250 cm
DSE 60-SP/250	6 mm	high-gloss polished	natural	250 cm
DSE 60/100	6 mm	natural	natural	100 cm
DSE 60/250	6 mm	natural	natural	250 cm
DSE 60 V4A/250	6 mm	natural	natural	250 cm
DSE 60/300	6 mm	natural	natural	300 cm
DSE 70-SF/250	7 mm	brushed	natural	250 cm
DSE 70/250	7 mm	natural	natural	250 cm
DSE 80-SF/250	8 mm	brushed	natural	250 cm

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.

DSE 80-SP/250	8 mm	high-gloss polished	natural	250 cm
DSE 80/100	8 mm	natural	natural	100 cm
DSE 80/250	8 mm	natural	natural	250 cm
DSE 80 V4A/250	8 mm	natural	natural	250 cm
DSE 80/300	8 mm	natural	natural	300 cm
DSE 90-SP/250	9 mm	high-gloss polished	natural	250 cm
DSE 90/250	9 mm	natural	natural	250 cm
DSE 90/300	9 mm	natural	natural	300 cm
DSE 100-SF/250	10 mm	brushed	natural	250 cm
DSE 100-SP/250	10 mm	high-gloss polished	natural	250 cm
DSE 100/100	10 mm	natural	natural	100 cm
DSE 100/250	10 mm	natural	natural	250 cm
DSE 100 V4A/250	10 mm	natural	natural	250 cm
DSE 100/300	10 mm	natural	natural	300 cm
DSE 110-SF/250	11 mm	brushed	natural	250 cm
DSE 110-SP/250	11 mm	high-gloss polished	natural	250 cm
DSE 110/100	11 mm	natural	natural	100 cm
DSE 110/250	11 mm	natural	natural	250 cm
DSE 110/300	11 mm	natural	natural	300 cm
DSE 125-SF/250	12.5 mm	brushed	natural	250 cm
DSE 125-SP/250	12.5 mm	high-gloss polished	natural	250 cm
DSE 125/100	12.5 mm	natural	natural	100 cm
DSE 125/250	12.5 mm	natural	natural	250 cm
DSE 125 V4A/250	12.5 mm	natural	natural	250 cm
DSE 125/300	12.5 mm	natural	natural	300 cm
DSE 140/250	14 mm	natural	natural	250 cm
DSE 150-SP/250	15 mm	high-gloss polished	natural	250 cm
DSE 150/250	15 mm	natural	natural	250 cm
DSE 150/300	15 mm	natural	natural	300 cm
DSE 165-SP/250	16.5 mm	high-gloss polished	natural	250 cm
DSE 165/250	16.5 mm	natural	natural	250 cm
DSE 170-SP/250	17 mm	high-gloss polished	natural	250 cm
DSE 170/250	17 mm	natural	natural	250 cm
DSE 175-SP/250	17.5 mm	high-gloss polished	natural	250 cm
DSE 175/250	17.5 mm	natural	natural	250 cm
DSE 200-SP/250	20 mm	high-gloss polished	natural	250 cm
DSE 200/250	20 mm	natural	natural	250 cm

Please note: For technical reasons, tolerances in color effects of the materials and print are possible.
All information is based on the best of our knowledge and belief. No guarantee can be derived from this.
We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



DSE 220-SP/250	22 mm	high-gloss polished	natural	250 cm
DSE 220/250	22 mm	natural	natural	250 cm
DSE 250-SP/250	25 mm	high-gloss polished	natural	250 cm
DSE 250/250	25 mm	natural	natural	250 cm
DSE 300-SP/250	30 mm	high-gloss polished	natural	250 cm
DSE 300/250	30 mm	natural	natural	250 cm

Please note: For technical reasons, tolerances in color effects of the materials and print are possible.
 All information is based on the best of our knowledge and belief. No guarantee can be derived from this.
 We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.