




DUROSOL Brass

L-Shaped Edge Trim Profile Made Of Brass

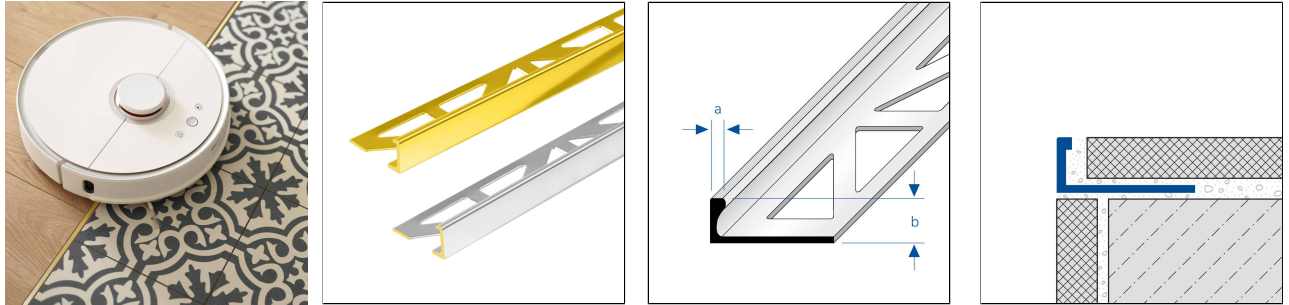

MATERIAL

Brass is particularly suitable for indoor areas with medium mechanical loads.

Brass oxidises (patinates) in the air. When used in damp rooms or in conjunction with aggressive cleaning agents, this process can intensify and stains may form. If necessary, polish with special cleaning pastes.

The applicability with regard to mechanical and chemical resistance must always be checked in each individual case.

CARE

Brass does not require any special care. If necessary, it can simply be cleaned with clear, clean water to which a few drops of household cleaning agent (washing-up liquid, citric acid) have been added. Then wipe dry.

The patina that develops over time on untreated brass surfaces can be removed by polishing with a soft cloth and washing-up liquid or citric acid. Then wipe dry.

Do not use abrasive products.

PROCESSING

1. Select the profile according to the tile thickness.
2. Apply tile adhesive with a notched trowel.
3. Press the profile into the adhesive bed and align.
4. Fill over the entire surface of the fixing leg.
5. Press the tiles firmly into place and align them so that they are flush with the upper edge of the profile. Lay the tiles fully flush.
6. Use suitable inner or outer corner pieces.
7. Leave a grout line of 1-2 mm to the profile.
8. Fill the space between the tiles and the profile completely with grout.

Protect visible surfaces from contact with tile adhesive or grout and, if necessary, clean immediately with a cloth and clean water. Then

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.

DURAL GmbH | Südring 11 | D-56412 Ruppach-Goldhausen | Germany | +49 2602/9261-0 | info@dural.com

DURAL Ltd. | Unit 6a | Wakefield Business Centre Denby Dale Rd | Wakefield | WF2 7AZ | United Kingdom | ukinfo@dural.com

The recognised standards and regulations of technology must be observed. Previous data sheets are invalid.

www.dural.com



wipe dry.

The generally recognised rules of technology must be observed. Suitability in terms of mechanical and chemical resistance must always be checked on a case-by-case basis.

TECHNICAL DIMENSIONS AND PRODUCT VARIANTS

Material	[Brass]
Surface	[natural], [chromed], [high-gloss polished]
Colour	natural, chrome
Length	250 cm
sight width	3 mm
Height	12.5 mm, 3 mm, 18.5 mm, 6 mm, 8 mm, 9 mm, 10 mm, 11 mm, 15 mm, 20 mm, 22 mm, 25 mm

PRODUCT VARIANTS

Ident	Height	Surface	Colour	Length
DSM 30/250	3 mm	natural	natural	250 cm
DSM 60-SC/250	6 mm	chromed	chrome	250 cm
DSM 60-SP/250	6 mm	high-gloss polished	natural	250 cm
DSM 60/250	6 mm	natural	natural	250 cm
DSM 80-SC/250	8 mm	chromed	chrome	250 cm
DSM 80-SP/250	8 mm	high-gloss polished	natural	250 cm
DSM 80/250	8 mm	natural	natural	250 cm
DSM 90-SC/250	9 mm	chromed	chrome	250 cm
DSM 90/250	9 mm	natural	natural	250 cm
DSM 100-SC/250	10 mm	chromed	chrome	250 cm
DSM 100-SP/250	10 mm	high-gloss polished	natural	250 cm
DSM 100/250	10 mm	natural	natural	250 cm
DSM 110/250	11 mm	natural	natural	250 cm
DSM 125-SC/250	12.5 mm	chromed	chrome	250 cm
DSM 125-SP/250	12.5 mm	high-gloss polished	natural	250 cm
DSM 125/250	12.5 mm	natural	natural	250 cm

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



DSM 150/250	15 mm	natural	natural	250 cm
DSM 185/250	18.5 mm	natural	natural	250 cm
DSM 200/250	20 mm	natural	natural	250 cm
DSM 220/250	22 mm	natural	natural	250 cm
DSM 250/250	25 mm	natural	natural	250 cm

Please note: For technical reasons, tolerances in color effects of the materials and print are possible.
 All information is based on the best of our knowledge and belief. No guarantee can be derived from this.
 We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.