


DUROSOL PVC

L-Shaped Edge Trim Profile Made Of PVC

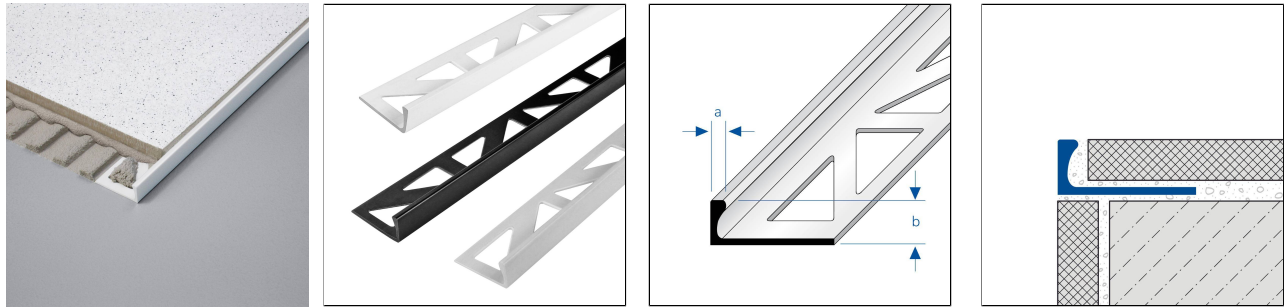

TECHNICAL DIMENSIONS AND PRODUCT VARIANTS

Material	PVC
Surface	gloss
Colour	black, white, silver grey
Length	250 cm, 300 cm
sight width	3 mm
Height (b)	12.5 mm, 6 mm, 8 mm, 10 mm, 11 mm

MATERIAL

PVC is particularly suitable for indoor and outdoor areas with low mechanical loads. The material is dyed throughout and is therefore UV-resistant under normal circumstances. However, colour differences may occur with constant UV exposure.

The applicability with regard to mechanical and chemical resistance must always be checked on a case-by-case basis.

Note: When using coloured joint mortar with ultra-fine colour pigments in conjunction with plastic profiles, irreversible profile staining may occur. We recommend the use of appropriate protective measures

CARE

PVC does not require any special care. It can be cleaned as needed with just clear, clean water with a few drops of washing-up liquid added.

Solvent-based and abrasive cleaning agents should be avoided.

PROCESSING

1. Select the profile according to the tile thickness. 2. Apply tile adhesive with a notched trowel. 3. Press the profile into the adhesive bed and align. 4. Fill over the entire surface of the fixing leg. 5. Press the tiles firmly into place and align them so that they are flush with the upper edge of the profile. Lay the tiles fully flush. 6. Leave a grout line of 1-2 mm to the profile. 7. Fill the space between the tiles and the profile completely with grout. Protect visible surfaces from contact with tile adhesive or grout and, if necessary, clean immediately with a cloth and clean water. Then wipe dry. The generally recognised rules of technology must be observed. Suitability in terms of mechanical and chemical resistance must always be checked on a case-by-case basis.

PRODUCT VARIANTS

09 May 2025 07:49 AM

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



Ident	Height (b)	Surface	Colour	Length
DSP 633/250	6 mm	gloss	black	250 cm
DSP 651/250	6 mm	gloss	silver grey	250 cm
DSP 630/250	6 mm	gloss	white	250 cm
DSP 630/300	6 mm	gloss	white	300 cm
DSP 833/250	8 mm	gloss	black	250 cm
DSP 851/250	8 mm	gloss	silver grey	250 cm
DSP 830/250	8 mm	gloss	white	250 cm
DSP 830/300	8 mm	gloss	white	300 cm
DSP 1033/250	10 mm	gloss	black	250 cm
DSP 1051/250	10 mm	gloss	silver grey	250 cm
DSP 1030/250	10 mm	gloss	white	250 cm
DSP 1030/300	10 mm	gloss	white	300 cm
DSP 1133/250	11 mm	gloss	black	250 cm
DSP 1151/250	11 mm	gloss	silver grey	250 cm
DSP 1130/250	11 mm	gloss	white	250 cm
DSP 1233/250	12.5 mm	gloss	black	250 cm
DSP 1251/250	12.5 mm	gloss	silver grey	250 cm
DSP 1230/250	12.5 mm	gloss	white	250 cm

09 May 2025 07:49 AM

Please note: For technical reasons, tolerances in color effects of the materials and print are possible.
All information is based on the best of our knowledge and belief. No guarantee can be derived from this.
We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.