




SHOWER-GK TILE

One-Piece Inclined Wedge For Wall Connection

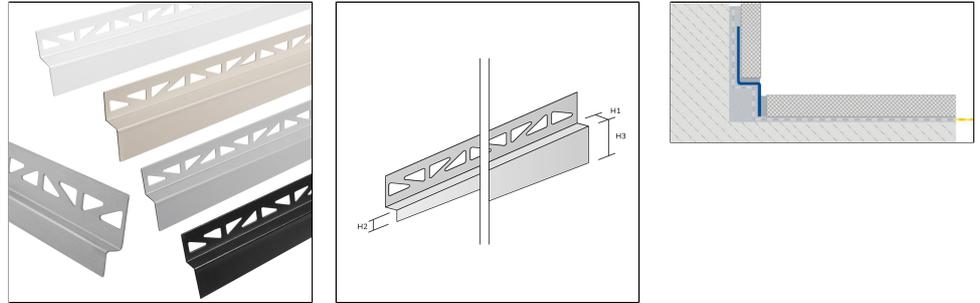

MATERIAL

Stainless steel (304) is particularly suitable for applications subject to high mechanical stress and for applications with particularly high requirements for cleanliness, hygiene and chemical resistance. Contact with products containing hydrochloric acid should be avoided.

No tools made of unalloyed steel may be used for processing. Open cut edges are not rust-resistant. If necessary, separate rust protection must be applied.

Even with stainless steel, flash rust may occur depending on the environmental conditions and should be removed immediately. The suitability of the material with regard to mechanical and chemical resistance must always be checked in individual cases. The suitability for mechanical and chemical stress must always be checked on a case-by-case basis.

CARE

Stainless steel V2A/304 does not require any special care. If necessary, it can be cleaned simply with clear, clean water and a few drops of washing-up liquid. Then wipe dry.

Avoid using acidic, alkaline and abrasive cleaning agents. Flash rust can be removed with commercially available polishes suitable for stainless steel.

PROCESSING

1. Select the profile according to the length of the shower area and the height of the tile covering.
2. Apply tile adhesive with a notched trowel.
3. Press the profile into the adhesive bed and align it.
4. Fill the fixing tabs completely with adhesive.
5. Press the tiles firmly into place and align them so that they are flush with the top edge of the profile. Lay the tiles so that they are completely covered.
6. Leave a 1-2 mm gap between the profile and the tiles.
7. Fill the space between the tiles and the profile completely with joint mortar.

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



Use a slow-running angle grinder with a suitable, clean cutting disc to cut the profiles. Prevent cutting sparks from settling on the profile surfaces.

Protect visible surfaces from contact with tile adhesive or grout and clean immediately with a cloth and clear water if necessary. Then rub dry.

The generally accepted rules of technology must be observed.

The generally accepted rules of technology and tiling must be observed. Suitability for use with mechanical and chemical resistance must always be checked in each individual case.

TECHNICAL DIMENSIONS AND PRODUCT VARIANTS

Material	[Stainless Steel (304)]
Surface	[tactile coated], [brushed]
Colour	natural, concrete grey (RAL 0006500), white matt (RAL 9003), black matt (RAL 9005), sand (RAL 0808005)
Length	98 cm, 120 cm, 148 cm, 200 cm
Height	12.5 mm, 6 mm, 8 mm, 10 mm, 11 mm
height 2	13.5, 7, 9, 11, 12
height 3	24, 32, 40

PRODUCT VARIANTS

Ident	Height	Surface	Colour	Length
GKWL 60-SF/98	6 mm	brushed	natural	98 cm
GKWR 60-SF/98	6 mm	brushed	natural	98 cm
GKWL 60-SF/120	6 mm	brushed	natural	120 cm
GKWR 60-SF/120	6 mm	brushed	natural	120 cm
GKWL 60-SF/148	6 mm	brushed	natural	148 cm
GKWR 60-SF/148	6 mm	brushed	natural	148 cm
GKWL 60-SF/200	6 mm	brushed	natural	200 cm
GKWR 60-SF/200	6 mm	brushed	natural	200 cm
GKWL 80-SF/98	8 mm	brushed	natural	98 cm
GKWR 80-SF/98	8 mm	brushed	natural	98 cm
GKWL 80-SF/120	8 mm	brushed	natural	120 cm
GKWR 80-SF/120	8 mm	brushed	natural	120 cm

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



GKWL 80-SF/148	8 mm	brushed	natural	148 cm
GKWR 80-SF/148	8 mm	brushed	natural	148 cm
GKWL 80-SF/200	8 mm	brushed	natural	200 cm
GKWR 80-SF/200	8 mm	brushed	natural	200 cm
GKWL 100-SF/98	10 mm	brushed	natural	98 cm
GKWR 100-SF/98	10 mm	brushed	natural	98 cm
GKWL 100-SF/120	10 mm	brushed	natural	120 cm
GKWR 100-SF/120	10 mm	brushed	natural	120 cm
GKWL 100-SF/148	10 mm	brushed	natural	148 cm
GKWR 100-SF/148	10 mm	brushed	natural	148 cm
GKWL 100-SF/200	10 mm	brushed	natural	200 cm
GKWR 100-SF/200	10 mm	brushed	natural	200 cm
GKWL 100-11/98	10 mm	tactile coated	black matt (RAL 9005)	98 cm
GKWR 100-11/98	10 mm	tactile coated	black matt (RAL 9005)	98 cm
GKWL 100-11/120	10 mm	tactile coated	black matt (RAL 9005)	120 cm
GKWR 100-11/120	10 mm	tactile coated	black matt (RAL 9005)	120 cm
GKWL 100-11/148	10 mm	tactile coated	black matt (RAL 9005)	148 cm
GKWR 100-11/148	10 mm	tactile coated	black matt (RAL 9005)	148 cm
GKWL 100-11/200	10 mm	tactile coated	black matt (RAL 9005)	200 cm
GKWR 100-11/200	10 mm	tactile coated	black matt (RAL 9005)	200 cm
GKWL 100-65/98	10 mm	tactile coated	concrete grey (RAL 0006500)	98 cm
GKWR 100-65/98	10 mm	tactile coated	concrete grey (RAL 0006500)	98 cm
GKWL 100-65/120	10 mm	tactile coated	concrete grey (RAL 0006500)	120 cm
GKWR 100-65/120	10 mm	tactile coated	concrete grey (RAL 0006500)	120 cm
GKWL 100-65/148	10 mm	tactile coated	concrete grey (RAL 0006500)	148 cm
GKWR 100-65/148	10 mm	tactile coated	concrete grey (RAL 0006500)	148 cm
GKWL 100-65/200	10 mm	tactile coated	concrete grey (RAL 0006500)	200 cm
GKWR 100-65/200	10 mm	tactile coated	concrete grey (RAL 0006500)	200 cm
GKWL 100-80/98	10 mm	tactile coated	sand (RAL 0808005)	98 cm
GKWR 100-80/98	10 mm	tactile coated	sand (RAL 0808005)	98 cm
GKWL 100-80/120	10 mm	tactile coated	sand (RAL 0808005)	120 cm
GKWR 100-80/120	10 mm	tactile coated	sand (RAL 0808005)	120 cm
GKWL 100-80/148	10 mm	tactile coated	sand (RAL 0808005)	148 cm
GKWR 100-80/148	10 mm	tactile coated	sand (RAL 0808005)	148 cm
GKWL 100-80/200	10 mm	tactile coated	sand (RAL 0808005)	200 cm
GKWR 100-80/200	10 mm	tactile coated	sand (RAL 0808005)	200 cm
GKWL 100-12/98	10 mm	tactile coated	white matt (RAL 9003)	98 cm

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



GKWR 100-12/98	10 mm	tactile coated	white matt (RAL 9003)	98 cm
GKWL 100-12/120	10 mm	tactile coated	white matt (RAL 9003)	120 cm
GKWR 100-12/120	10 mm	tactile coated	white matt (RAL 9003)	120 cm
GKWL 100-12/148	10 mm	tactile coated	white matt (RAL 9003)	148 cm
GKWR 100-12/148	10 mm	tactile coated	white matt (RAL 9003)	148 cm
GKWL 100-12/200	10 mm	tactile coated	white matt (RAL 9003)	200 cm
GKWR 100-12/200	10 mm	tactile coated	white matt (RAL 9003)	200 cm
GKWL 110-SF/98	11 mm	brushed	natural	98 cm
GKWR 110-SF/98	11 mm	brushed	natural	98 cm
GKWL 110-SF/120	11 mm	brushed	natural	120 cm
GKWR 110-SF/120	11 mm	brushed	natural	120 cm
GKWL 110-SF/148	11 mm	brushed	natural	148 cm
GKWR 110-SF/148	11 mm	brushed	natural	148 cm
GKWL 110-SF/200	11 mm	brushed	natural	200 cm
GKWR 110-SF/200	11 mm	brushed	natural	200 cm
GKWL 110-11/98	11 mm	tactile coated	black matt (RAL 9005)	98 cm
GKWR 110-11/98	11 mm	tactile coated	black matt (RAL 9005)	98 cm
GKWL 110-11/120	11 mm	tactile coated	black matt (RAL 9005)	120 cm
GKWR 110-11/120	11 mm	tactile coated	black matt (RAL 9005)	120 cm
GKWL 110-11/148	11 mm	tactile coated	black matt (RAL 9005)	148 cm
GKWR 110-11/148	11 mm	tactile coated	black matt (RAL 9005)	148 cm
GKWL 110-11/200	11 mm	tactile coated	black matt (RAL 9005)	200 cm
GKWR 110-11/200	11 mm	tactile coated	black matt (RAL 9005)	200 cm
GKWL 110-65/98	11 mm	tactile coated	concrete grey (RAL 0006500)	98 cm
GKWR 110-65/98	11 mm	tactile coated	concrete grey (RAL 0006500)	98 cm
GKWL 110-65/120	11 mm	tactile coated	concrete grey (RAL 0006500)	120 cm
GKWR 110-65/120	11 mm	tactile coated	concrete grey (RAL 0006500)	120 cm
GKWL 110-65/148	11 mm	tactile coated	concrete grey (RAL 0006500)	148 cm
GKWR 110-65/148	11 mm	tactile coated	concrete grey (RAL 0006500)	148 cm
GKWL 110-65/200	11 mm	tactile coated	concrete grey (RAL 0006500)	200 cm
GKWR 110-65/200	11 mm	tactile coated	concrete grey (RAL 0006500)	200 cm
GKWL 110-80/98	11 mm	tactile coated	sand (RAL 0808005)	98 cm
GKWR 110-80/98	11 mm	tactile coated	sand (RAL 0808005)	98 cm
GKWL 110-80/120	11 mm	tactile coated	sand (RAL 0808005)	120 cm
GKWR 110-80/120	11 mm	tactile coated	sand (RAL 0808005)	120 cm
GKWL 110-80/148	11 mm	tactile coated	sand (RAL 0808005)	148 cm
GKWR 110-80/148	11 mm	tactile coated	sand (RAL 0808005)	148 cm

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



GKWL 110-80/200	11 mm	tactile coated	sand (RAL 0808005)	200 cm
GKWR 110-80/200	11 mm	tactile coated	sand (RAL 0808005)	200 cm
GKWL 125-SF/98	12.5 mm	brushed	natural	98 cm
GKWR 125-SF/98	12.5 mm	brushed	natural	98 cm
GKWL 125-SF/120	12.5 mm	brushed	natural	120 cm
GKWR 125-SF/120	12.5 mm	brushed	natural	120 cm
GKWL 125-SF/148	12.5 mm	brushed	natural	148 cm
GKWR 125-SF/148	12.5 mm	brushed	natural	148 cm
GKWL 125-SF/200	12.5 mm	brushed	natural	200 cm
GKWR 125-SF/200	12.5 mm	brushed	natural	200 cm
GKWL 125-11/98	12.5 mm	tactile coated	black matt (RAL 9005)	98 cm
GKWR 125-11/98	12.5 mm	tactile coated	black matt (RAL 9005)	98 cm
GKWL 125-11/120	12.5 mm	tactile coated	black matt (RAL 9005)	120 cm
GKWR 125-11/120	12.5 mm	tactile coated	black matt (RAL 9005)	120 cm
GKWL 125-11/148	12.5 mm	tactile coated	black matt (RAL 9005)	148 cm
GKWR 125-11/148	12.5 mm	tactile coated	black matt (RAL 9005)	148 cm
GKWL 125-11/200	12.5 mm	tactile coated	black matt (RAL 9005)	200 cm
GKWR 125-11/200	12.5 mm	tactile coated	black matt (RAL 9005)	200 cm
GKWL 125-65/98	12.5 mm	tactile coated	concrete grey (RAL 0006500)	98 cm
GKWR 125-65/98	12.5 mm	tactile coated	concrete grey (RAL 0006500)	98 cm
GKWL 125-65/120	12.5 mm	tactile coated	concrete grey (RAL 0006500)	120 cm
GKWR 125-65/120	12.5 mm	tactile coated	concrete grey (RAL 0006500)	120 cm
GKWL 125-65/148	12.5 mm	tactile coated	concrete grey (RAL 0006500)	148 cm
GKWR 125-65/148	12.5 mm	tactile coated	concrete grey (RAL 0006500)	148 cm
GKWL 125-65/200	12.5 mm	tactile coated	concrete grey (RAL 0006500)	200 cm
GKWR 125-65/200	12.5 mm	tactile coated	concrete grey (RAL 0006500)	200 cm
GKWL 125-80/98	12.5 mm	tactile coated	sand (RAL 0808005)	98 cm
GKWR 125-80/98	12.5 mm	tactile coated	sand (RAL 0808005)	98 cm
GKWL 125-80/120	12.5 mm	tactile coated	sand (RAL 0808005)	120 cm
GKWR 125-80/120	12.5 mm	tactile coated	sand (RAL 0808005)	120 cm
GKWL 125-80/148	12.5 mm	tactile coated	sand (RAL 0808005)	148 cm
GKWR 125-80/148	12.5 mm	tactile coated	sand (RAL 0808005)	148 cm
GKWL 125-80/200	12.5 mm	tactile coated	sand (RAL 0808005)	200 cm
GKWR 125-80/200	12.5 mm	tactile coated	sand (RAL 0808005)	200 cm

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.