




LP-TRANS

Adjustable height profile made of aluminium

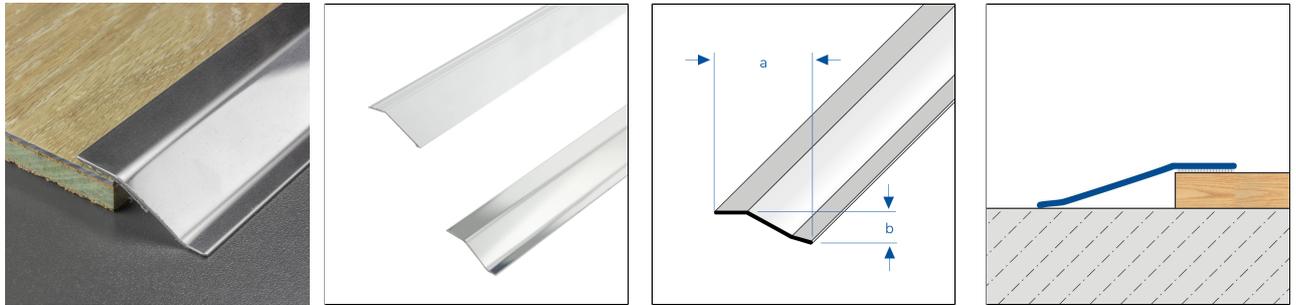

PROPERTIES

Self adhesive. Without visible fastening

MATERIAL

Aluminium can be used wherever medium mechanical stress is to be expected. Contact with alkaline materials (e.g. tile adhesive) can cause discolouration that is almost impossible to remove. High humidity can intensify this process. Dirt deposits can be removed with standard cleaning agents. Cleaning agents must be free of abrasive powders or aggressive additives.

Stainless steel V2A/304 is particularly suitable for applications subject to high mechanical stress and for applications with particularly high requirements for cleanliness, hygiene and chemical resistance. Contact with products containing hydrochloric acid must be avoided.

No tools made of unalloyed steel may be used during processing. Open cut edges are not rust-resistant. If necessary, separate rust protection must be applied.

Even with stainless steel, flash rust may occur depending on the environmental conditions and should be removed immediately.

The suitability with regard to mechanical and chemical resistance must always be checked in each individual case.

CARE

Aluminium does not require any special care. If necessary, it can be cleaned with clear, clean water and a drop of washing-up liquid. Then wipe dry. Acidic, alkaline and abrasive cleaning agents should be avoided.

Stainless steel V2A/304 does not require any special care. If necessary, it can be cleaned with clear, clean water and a drop of washing-up liquid. Then wipe dry. Avoid using acidic, alkaline or abrasive cleaning agents. Flash rust can be removed with commercially available polishes suitable for stainless steel.

PROCESSING

1. Cut the profiles to size.
2. The substrate must be cleaned and any contaminants such as release agents, preservatives, grease, oil, dust, water, old

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



adhesives/sealants and other substances that impair adhesion must be removed.

3. Remove the protective film from the adhesive strip, align the profile and stick it to the desired location.

The generally accepted rules of technology and tiling must be observed. Suitability for use with mechanical and chemical resistance must always be checked in each individual case.

TECHNICAL DIMENSIONS AND PRODUCT VARIANTS

Material	[Aluminium], [Stainless Steel (304)]
Surface	[natural], [anodised]
Colour	natural, silver
Length	90 cm, 270 cm
Height	5 mm, 6 mm, 8 mm, 12 mm, 20 mm
Width mm	30 mm, 40 mm, 43 mm, 55 mm
height up to	8 mm, 10 mm, 12 mm, 16 mm, 22 mm

PRODUCT VARIANTS

Ident	Height	Surface	Colour	Length
LPTE 800-SK/90	5 mm	natural	natural	90 cm
LPTE 800-SK/270	5 mm	natural	natural	270 cm
LPTAE 800-SK/90	6 mm	anodised	silver	90 cm
LPTAE 800-SK/270	6 mm	anodised	silver	270 cm
LPTE 1400-SK/90	8 mm	natural	natural	90 cm
LPTE 1400-SK/270	8 mm	natural	natural	270 cm
LPTAE 1400-SK/90	12 mm	anodised	silver	90 cm
LPTAE 1400-SK/270	12 mm	anodised	silver	270 cm
LPTAE 2200-SK/90	20 mm	anodised	silver	90 cm
LPTAE 2200-SK/270	20 mm	anodised	silver	270 cm

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.