


SQUARESTEP

Stair Profile With Rectangular Visible Surface Made Of Aluminium

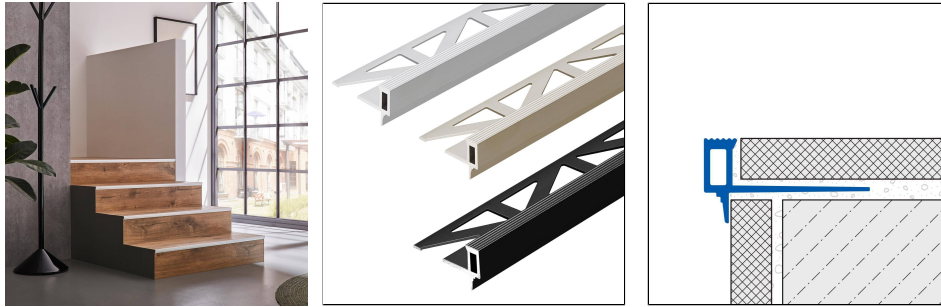

TECHNICAL DIMENSIONS AND PRODUCT VARIANTS

Material	Aluminium
Surface	powder coated, anodised
Colour	silver, titanium, anthracite grey matt (RAL 7016), black matt (RAL 9005)
Length	100 cm, 250 cm, 300 cm
sight width	8 mm
Height (b)	13.5 mm, 9 mm, 11 mm, 22 mm
Width mm	39 mm
height 3	7

ACCESSORIES

Matching corner pieces and end caps are available as accessories

MATERIAL

Aluminium can be used wherever a medium mechanical load-bearing capacity is to be expected. Contact with alkaline materials (e.g. tile adhesive) can lead to discolouration, which can hardly be removed afterwards. High humidity during the drying phase can intensify this process. Always wipe off tile adhesive or grout on visible surfaces immediately with plenty of water, then wipe dry and ensure that the room is well ventilated.

Suitability in terms of mechanical and chemical resistance must always be checked on a case-by-case basis.

CARE

Aluminium does not require any special care. If necessary, it can simply be damp-cleaned with clear, clean water and a few drops of washing-up liquid. Then wipe dry.

Acidic and abrasive cleaning agents should be avoided.

PROCESSING

1. Select the profile according to the tile thickness.
2. Apply tile adhesive with a notched trowel.

25 April 2025 05:53 PM

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



- 3 Press the profile into the adhesive bed and align.
4. Fill over the entire surface of the fixing leg.
5. Press the tiles firmly into place and align them so that they are flush with the upper edge of the profile. Lay the tiles fully flush.
- 6 Use suitable inner or outer corner pieces.
7. Leave a joint of 1-2 mm to the profile.
8. Fill the space between the tiles and the profile completely with grout.

Protect visible surfaces from contact with tile adhesive or grout and, if necessary, clean immediately with a cloth and clean water. Then rub dry.

The generally recognised rules of technology must be observed. Suitability in terms of mechanical and chemical resistance must always be checked on a case-by-case basis.

PRODUCT VARIANTS

Ident	Height (b)	Surface	Colour	Length
SQSAE 90/100	9 mm	anodised	silver	100 cm
SQSAE 90/250	9 mm	anodised	silver	250 cm
SQSAE 90/300	9 mm	anodised	silver	300 cm
SQSAE 90-T/250	9 mm	anodised	titanium	250 cm
SQSACM 911/250	9 mm	powder coated	black matt (RAL 9005)	250 cm
SQSAE 110/100	11 mm	anodised	silver	100 cm
SQSAE 110/250	11 mm	anodised	silver	250 cm
SQSAE 110/300	11 mm	anodised	silver	300 cm
SQSAE 110-T/250	11 mm	anodised	titanium	250 cm
SQSACM 1111/250	11 mm	powder coated	black matt (RAL 9005)	250 cm
SQSAE 135/100	13.5 mm	anodised	silver	100 cm
SQSAE 135/250	13.5 mm	anodised	silver	250 cm
SQSAE 135/300	13.5 mm	anodised	silver	300 cm
SQSAE 135-T/250	13.5 mm	anodised	titanium	250 cm
SQSACM 1311/250	13.5 mm	powder coated	black matt (RAL 9005)	250 cm
SQSAE 220/250	22 mm	anodised	silver	250 cm
SQSACM 2216/250	22 mm	powder coated	anthracite grey matt (RAL 7016)	250 cm

25 April 2025 05:53 PM

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.