




STEP

Stair Nosing Profile Made Of Aluminium For PVC Inserts For Retrofitting

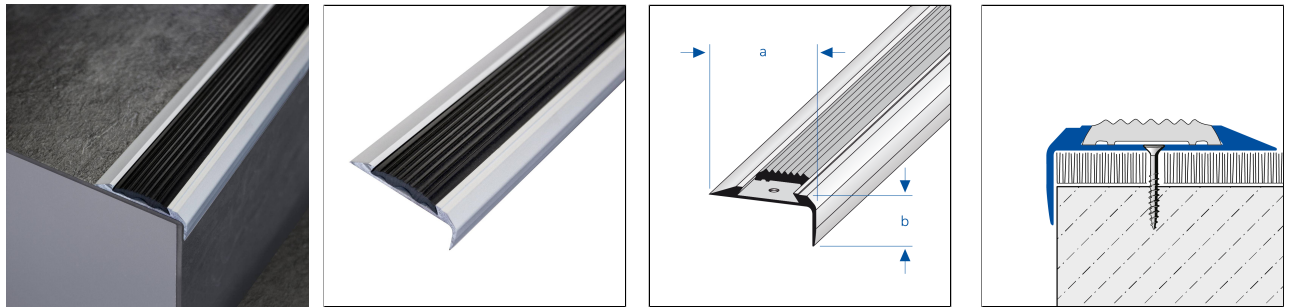

MATERIAL

Aluminium can be used wherever medium mechanical loads are expected. Contact with alkaline materials (e.g. tile adhesive) can cause discolouration that is difficult to remove.

PVC is particularly suitable for indoor and outdoor areas with low mechanical loads. The material is solid-coloured and therefore UV-resistant under normal circumstances, but colour differences may occur with constant UV exposure.

The suitability with regard to mechanical and chemical resistance must always be checked on a case-by-case basis.

CARE

Aluminium does not require any special care. If necessary, it can be cleaned with clear, clean water and a few drops of washing-up liquid. Then wipe dry. Avoid using acidic and abrasive cleaning agents.

PVC does not require any special care. If necessary, it can be cleaned simply with clear, clean water and a few drops of washing-up liquid. Avoid using cleaning agents containing solvents or abrasives.

PROCESSING

1. Place the profile on the substrate and align it.
2. Fix the profile to the substrate using sufficiently dimensioned dowels/screws.
3. Cut the profile at an angle to form corners. Seal the mitre joint with a neutral cross-linked silicon.
4. Before inserting the safety inserts, clean the adhesive surfaces and remove any substances that could impair adhesion.

The generally accepted rules of technology and tiling must be observed. Suitability for use with mechanical and chemical resistance must always be checked in each individual case.

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



TECHNICAL DIMENSIONS AND PRODUCT VARIANTS

Material	[Aluminium]
Surface	[anodised]
Colour	silver
Length	250 cm
Height	12 mm
Width mm	45 mm

PRODUCT VARIANTS

Ident	Height	Surface	Colour	Length
STAE 4500/12/250	12 mm	anodised	silver	250 cm

Please note: For technical reasons, tolerances in color effects of the materials and print are possible.
 All information is based on the best of our knowledge and belief. No guarantee can be derived from this.
 We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.