


T-FLOOR

Separating and cover profile for retrospective installation

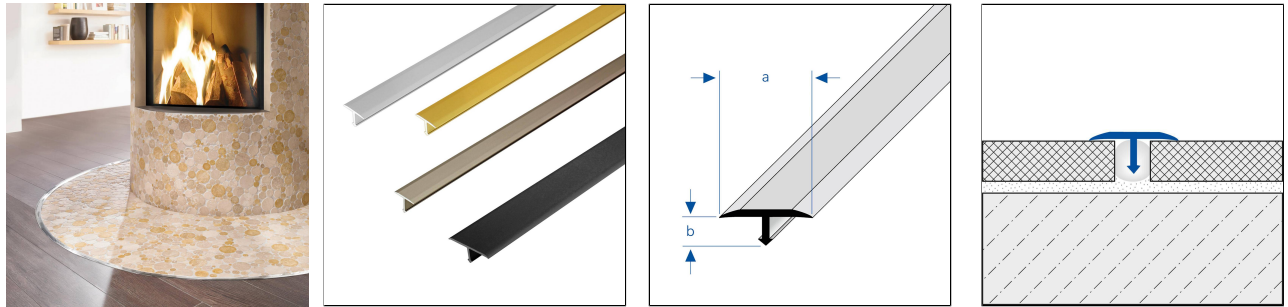

MATERIAL

Aluminium can be used wherever a medium mechanical stresses are expected. Contact with alkaline materials (e.g. tile adhesive) can lead to discolouration, which can be difficult to remove afterwards. High humidity during the drying phase can intensify this process. Always wipe off tile adhesive or grout on visible surfaces immediately with plenty of water, then wipe dry and ensure that the room is well ventilated.

Suitability in terms of mechanical and chemical resistance must always be checked on a case-by-case basis.

CARE

Aluminium does not require any special care. If necessary, it can simply be damp-cleaned with clear, clean water and a few drops of washing-up liquid. Then wipe dry.

Acidic, alkaline and abrasive cleaning agents should be avoided.

PROCESSING

1. Ensure the wall /floor junction is clean and free of debris (at least 5 mm deep).
2. Inject the wall/floor junction with an elastic sealing material (SPEED-FLEX or similar).
3. Press in the centre bar of the profile until the profile is firmly adhered to the surfaces on both sides.
4. Use the matching internal and external corner pieces available as accessories to form corners. In terms of installation, the internal or external corner pieces should be fitted first, then the profile should be fully installed without leaving a joint.
5. Close the open ends with the appropriate end caps.

The generally recognised rules of technology must be observed. The suitability with regard to mechanical and chemical resistance must always be checked in each individual case.

Please note: For technical reasons, tolerances in color effects of the materials and print are possible.
All information is based on the best of our knowledge and belief. No guarantee can be derived from this.
We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



TECHNICAL DIMENSIONS AND PRODUCT VARIANTS

Material	[Aluminium]
Surface	[powder coated], [natural], [anodised]
Colour	natural, silver, gold, titanium, black matt (RAL 9005)
Length	100 cm, 250 cm, 300 cm
sight width	14 mm, 25 mm
Height	6 mm
Width mm	14 mm, 25 mm
height up to	7 mm

PRODUCT VARIANTS

Ident	Height	Surface	Colour	Length
TFAE 1400-G/100	6 mm	anodised	gold	100 cm
TFAE 2500-G/100	6 mm	anodised	gold	100 cm
TFAE 1400-G/250	6 mm	anodised	gold	250 cm
TFAE 2500-G/250	6 mm	anodised	gold	250 cm
TFAE 1400/100	6 mm	anodised	silver	100 cm
TFAE 2500/100	6 mm	anodised	silver	100 cm
TFAE 1400/250	6 mm	anodised	silver	250 cm
TFAE 2500/250	6 mm	anodised	silver	250 cm
TFAE 1400/300	6 mm	anodised	silver	300 cm
TFAE 2500/300	6 mm	anodised	silver	300 cm
TFAE 1400-T/100	6 mm	anodised	titanium	100 cm
TFAE 2500-T/100	6 mm	anodised	titanium	100 cm
TFAE 1400-T/250	6 mm	anodised	titanium	250 cm
TFAE 2500-T/250	6 mm	anodised	titanium	250 cm
TFA 1400/100	6 mm	natural	natural	100 cm
TFA 2500/100	6 mm	natural	natural	100 cm
TFA 1400/250	6 mm	natural	natural	250 cm
TFA 2500/250	6 mm	natural	natural	250 cm
TFA 1400/300	6 mm	natural	natural	300 cm
TFA 2500/300	6 mm	natural	natural	300 cm
TFACM 1411/250	6 mm	powder coated	black matt (RAL 9005)	250 cm
TFACM 2511/250	6 mm	powder coated	black matt (RAL 9005)	250 cm

Please note: For technical reasons, tolerances in color effects of the materials and print are possible.
 All information is based on the best of our knowledge and belief. No guarantee can be derived from this.
 We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.