




T-FLOOR Stainless steel (304)

Separating And Cover Profile For Retrospective Installation

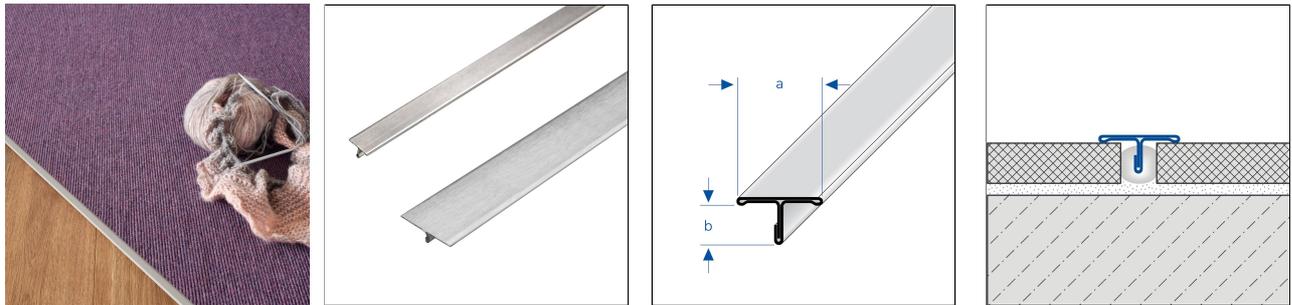

MATERIAL

Stainless steel (V2A/304) is particularly suitable for areas of application subject to high mechanical stresses and where particularly high demands are placed on cleanliness, hygiene and chemical resistance. Contact with products containing hydrochloric acid should be avoided.

Tools made of unalloyed steel must not be used during processing. Open cut edges are not rust-resistant. If necessary, separate rust protection must be applied to cut-edges.

Depending on the environmental conditions, rust film may also form on stainless steel and should be removed immediately.

The usability in terms of mechanical and chemical resistance must always be checked on a case-by-case basis.

CARE

Stainless steel (V2A/304) does not require any special care. If necessary, it can simply be cleaned with clear, clean water and a few drops of washing-up liquid. Then wipe dry.

Acidic, alkaline and abrasive cleaning agents should be avoided. Flash rust can be removed with commercially available polishes suitable for stainless steel.

PROCESSING

1. Ensure the wall /floor junction is clean and free of debris (at least 5 mm deep).
2. Inject the wall/floor junction with an elastic sealing material (SPEED-FLEX or similar).
3. Press in the centre bar of the profile until the profile is firmly adhered to the surfaces on both sides.
4. Use the matching internal and external corner pieces available as accessories to form corners. In terms of installation, the internal or external corner pieces should be fitted first, then the profile should be fully installed without leaving a joint.
5. Close the open ends with the appropriate end caps.

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



The generally recognised rules of technology must be observed. The suitability with regard to mechanical and chemical resistance must always be checked in each individual case.

TECHNICAL DIMENSIONS AND PRODUCT VARIANTS

| | |
|-------------|---|
| Material | [Stainless Steel (304)] |
| Surface | [natural], [brushed], [high-gloss polished] |
| Colour | natural |
| Length | 250 cm |
| sight width | 14 mm, 25 mm |
| Height | 7 mm |
| Width mm | 14 mm, 25 mm |

PRODUCT VARIANTS

| Ident | Height | Surface | Colour | Length |
|-----------------|--------|---------------------|---------|--------|
| TFE 1400-SF/250 | 7 mm | brushed | natural | 250 cm |
| TFE 2500-SF/250 | 7 mm | brushed | natural | 250 cm |
| TFE 1400-SP/250 | 7 mm | high-gloss polished | natural | 250 cm |
| TFE 2500-SP/250 | 7 mm | high-gloss polished | natural | 250 cm |
| TFE 1400/250 | 7 mm | natural | natural | 250 cm |
| TFE 2500/250 | 7 mm | natural | natural | 250 cm |

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.