




# TACNOP NF-D

Tactile warning mat for the creation of tactile studded panels (DIN)

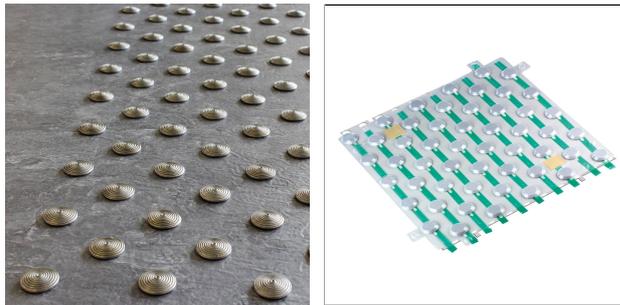

## PROPERTIES

Self adhesive.

Good mechanical, chemical and thermal resistance.

For indoor areas on all floors except carpet.

Stud height: 3.5 mm

Nub diameter: 25 mm

Film with 50 studs (300 x 300 mm) serves as a laying template

Quick installation: approx. 7 min./linear metre

## MATERIAL

TPU (thermoPlastic Polyurethane)

Stainless steel V2A/304 is particularly suitable for applications subject to high mechanical stress and for applications with particularly high requirements for cleanliness, hygiene and chemical resistance. Contact with products containing hydrochloric acid should be avoided.

No tools made of unalloyed steel may be used during processing. Open cut edges are not rust-resistant. If necessary, separate rust protection must be applied.

Even with stainless steel, flash rust may occur depending on the environmental conditions and should be removed immediately.

The suitability of the material with regard to mechanical and chemical resistance must always be checked in individual cases.

The suitability for use in terms of mechanical and chemical resistance must always be checked on a case-by-case basis.

## CARE

Stainless steel (304) does not require any special care. If necessary, it can be cleaned with clear, clean water and a few drops of washing-up liquid. Then wipe dry.

Please note: For technical reasons, tolerances in color effects of the materials and print are possible.  
All information is based on the best of our knowledge and belief. No guarantee can be derived from this.  
We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.

**DURAL GmbH** | Südring 11 | D-56412 Ruppach-Goldhausen | Germany | +49 2602/9261-0 | info@dural.com

**DURAL Ltd.** | Unit 6a | Wakefield Business Centre Denby Dale Rd | Wakefield | WF2 7AZ | United Kingdom | ukinfo@dural.com

The recognised standards and regulations of technology must be observed. Previous data sheets are invalid.

**www.dural.com**



Avoid using acidic, alkaline and abrasive cleaning agents. Flash rust can be removed with commercially available polishes suitable for stainless steel.

**PROCESSING**

1. The substrate must be cleaned. Any contaminants such as release agents, preservatives, grease, oil, dust, water, old adhesives/sealants and other residues that could impair adhesion must be completely removed.
2. Mark the area where the film is to be placed.
3. Remove the protective film from the back of the fixing film. Align the fixing film and stick it in the desired position.
4. Repeat this process with additional films until the marked area has been completely covered.
5. Press down any bubbles by carefully walking over them with your feet.
6. Remove the fixing film.
7. Press down any remaining bubbles by carefully walking over them with your feet.

The generally accepted rules of technology and tiling must be observed. Suitability for use with mechanical and chemical resistance must always be checked in each individual case.

**TECHNICAL DIMENSIONS AND PRODUCT VARIANTS**

Material	[TPU], [Stainless Steel (304)]
Surface	[grooved], [anti-slip]
Colour	natural, white, black, grey
Height	3.5 mm
diameter	25 mm
dimension	30 x 30 cm (Folie)

**PRODUCT VARIANTS**

Ident	Height	Surface	Colour
TNPM 2533-3 SK/9	3.5 mm	anti-slip	black
TNPM 2538-3 SK/9	3.5 mm	anti-slip	grey
TNPM 2530-3 SK/9	3.5 mm	anti-slip	white
TNEGM 25-3 SK	3.5 mm	grooved	natural
TNEGM 25-3 SK/9	3.5 mm	grooved	natural

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.