




# TACNOP NF-F

Einzelnoppen fertig konfektioniert auf Folie zur einfachen Erstellung taktiler Noppenfelder nach französischer Norm NF P-351 und NF P-352

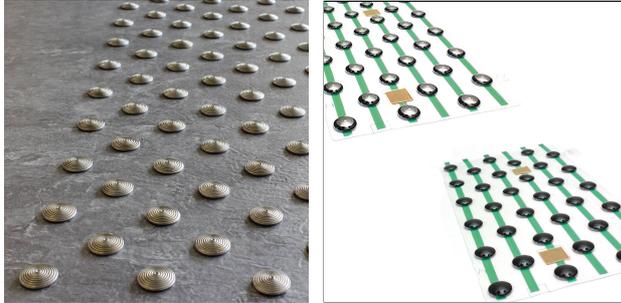

## TECHNICAL DIMENSIONS AND PRODUCT VARIANTS

Material	[Aluminium], [TPU], [Stainless Steel (304)]
Surface	[grooved]
Colour	silver, black, grey
Height	5 mm
diameter	25 mm
dimension	420 x 225 mm (Folie)

## PRODUCT VARIANTS

Ident	Height	Surface	Colour
TNPM 2533-5 SK/1	5 mm	grooved	black
TNPM 2538-5 SK/1	5 mm	grooved	grey
TNAGM 25-5 SK/1	5 mm	grooved	silver
TNEEM 25-5 SK/1	5 mm	grooved	silver
TNEGM 25-5 SK/1	5 mm	grooved	silver

## Data sheet Accessories

Self adhesive.  
 Good mechanical, chemical and thermal resistance.  
 For indoor areas on all floors except carpet.

Complies with: NF P98-351  
 Nub height: 5 mm  
 Stud diameter: 25 mm  
 Film with 33 studs (420 x 225 mm) serves as a laying template  
 Quick installation: approx. 7 min./running metre

## PROPERTIES

Self adhesive.

Please note: For technical reasons, tolerances in color effects of the materials and print are possible.  
 All information is based on the best of our knowledge and belief. No guarantee can be derived from this.  
 We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



Good mechanical, chemical and thermal resistance.  
For indoor areas on all floors except carpet.

Complies with: NF P98-351  
Nub height: 5 mm  
Stud diameter: 25 mm  
Film with 33 studs (420 x 225 mm) serves as a laying template  
Quick installation: approx. 7 min./running metre

## MATERIAL

TPU (thermoPlastic Polyurethane)

Aluminium can be used wherever medium mechanical stress is to be expected. Contact with alkaline materials (e.g. tile adhesive) can lead to discolouration, which is difficult to remove afterwards. High humidity during the drying phase can intensify this process. Always wipe tile adhesive or grout from visible surfaces immediately with plenty of water, then wipe dry and ensure good room ventilation.

Stainless steel V2A/304 is particularly suitable for applications subject to high mechanical stress and for applications with particularly high requirements for cleanliness, hygiene and chemical resistance. Contact with products containing hydrochloric acid should be avoided.

Do not use tools made of unalloyed steel during processing. Open cut edges are not rust-resistant. If necessary, separate rust protection should be applied there.

Even with stainless steel, flash rust may occur depending on the environmental conditions and should be removed immediately. The suitability of the material with regard to mechanical and chemical resistance must always be checked in individual cases. The suitability for use in terms of mechanical and chemical resistance must always be checked on a case-by-case basis.

## PROCESSING

1. The substrate must be cleaned. Any contaminants such as release agents, preservatives, grease, oil, dust, water, old adhesives/sealants and other residues that could impair adhesion must be completely removed.
2. Mark the area where the film is to be placed.
3. Remove the protective film from the back of the fixing film. Align the fixing film and stick it in the desired position.
4. Repeat this process with additional films until the marked area has been completely covered.
5. Press down any bubbles by carefully walking over them with your feet.
6. Remove the fixing film.
7. Press down any remaining bubbles by carefully walking over them with your feet.

The generally accepted rules of technology and tiling must be observed. Suitability for use with mechanical and chemical resistance must always be checked in each individual case.

## CARE

Aluminium does not require any special care. If necessary, it can be easily cleaned with clear, clean water and a few drops of washing-up liquid. Then wipe dry.

Avoid using acidic, alkaline and abrasive cleaning agents.

Please note: For technical reasons, tolerances in color effects of the materials and print are possible.  
All information is based on the best of our knowledge and belief. No guarantee can be derived from this.  
We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



Stainless steel (304) does not require any special care. If necessary, it can be cleaned with clear, clean water and a few drops of washing-up liquid. Then wipe dry.

Avoid using acidic, alkaline and abrasive cleaning agents. Flash rust can be removed with commercially available polishes suitable for stainless steel.

Please note: For technical reasons, tolerances in color effects of the materials and print are possible.  
All information is based on the best of our knowledge and belief. No guarantee can be derived from this.  
We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.