




TACNOP TNP

Single PU studs for indoor areas according to German DIN standard

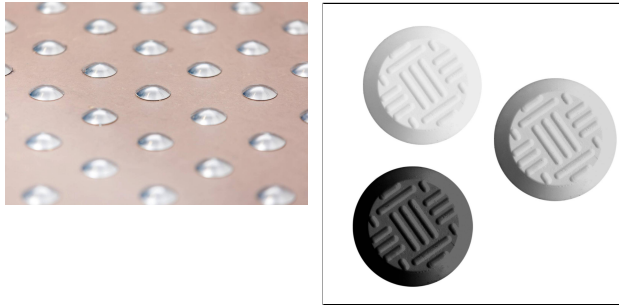

ACCESSORIES

Templates for standard installation of the single studs are available as accessories.

PROPERTIES

Self adhesive.

Adhesive: 3M.

For indoor areas on all floors except carpet.

Nub height: 3.3 mm

Nub diameter: 25 mm

Stud surface: grooved

Slip resistance class: R11

MATERIAL

Polyurethane

PROCESSING

1. The substrate must be cleaned. Any contaminants such as release agents, preservatives, grease, oil, dust, water, old adhesives/sealants and other residues that could impair adhesion must be completely removed.
2. Mark the area where the film is to be placed.
3. Stick the template in the desired position on the floor.
4. We recommend using two connected templates (tongue and groove) at the start.
5. Remove the protective film from the back of the stud and stick it to the desired position using the template.
6. Continue with further studs as described in point 5 until the template is completely filled.
7. Press the studs down further by carefully walking over them with your feet.
8. Remove the template and press the nubs again by carefully walking over them with your feet.
9. If necessary, continue with step 3.

Please note: For technical reasons, tolerances in color effects of the materials and print are possible.
All information is based on the best of our knowledge and belief. No guarantee can be derived from this.
We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



The generally accepted rules of technology and tiling must be observed. Suitability for use with mechanical and chemical resistance must always be checked in each individual case.

TECHNICAL DIMENSIONS AND PRODUCT VARIANTS

Material	[Polyurethane]
Surface	[smooth], [grooved]
Colour	white, black, grey
Height	3.3 mm
diameter	25 mm

PRODUCT VARIANTS

Ident	Height	Surface	Colour
TNPG 2533-3 B	3.3 mm	grooved	black
TNPG 2533-3 K	3.3 mm	grooved	black
TNPG 2533-3 SK	3.3 mm	grooved	black
TNPG 2538-3 B	3.3 mm	grooved	grey
TNPG 2538-3 K	3.3 mm	grooved	grey
TNPG 2538-3 SK	3.3 mm	grooved	grey
TNPG 2530-3 B	3.3 mm	grooved	white
TNPG 2530-3 K	3.3 mm	grooved	white
TNPG 2530-3 SK	3.3 mm	grooved	white
TNP 2533-3 B	3.3 mm	smooth	black
TNP 2533-3 K	3.3 mm	smooth	black
TNP 2533-3 SK	3.3 mm	smooth	black
TNP 2538-3 B	3.3 mm	smooth	grey
TNP 2538-3 K	3.3 mm	smooth	grey
TNP 2538-3 SK	3.3 mm	smooth	grey
TNP 2530-3 B	3.3 mm	smooth	white
TNP 2530-3 K	3.3 mm	smooth	white
TNP 2530-3 SK	3.3 mm	smooth	white
TNP 2533-3 SK	3.3 mm	smooth	

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.