


# TACNOP L-F

Tactile studs according to French standard

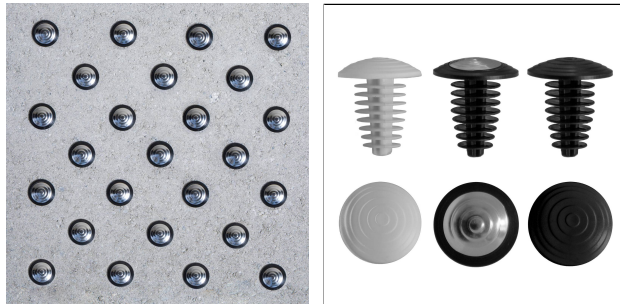

## ACCESSORIES

Templates for standard installation of the single studs are available as accessories.

## PROPERTIES

Impact mounting.  
Good mechanical, chemical and thermal resistance.  
For all indoor and outdoor areas.  
Complies with: NF P98-351  
Stud height: 5 mm  
Stud diameter: 25 mm  
Stud surface: grooved  
Pin length: 25 mm

## MATERIAL

TPU (thermoPlastic Polyurethane)

Stainless steel V2A/304 is particularly suitable for applications subject to high mechanical stress and for applications with particularly high requirements for cleanliness, hygiene and chemical resistance. Contact with products containing hydrochloric acid should be avoided.

No tools made of unalloyed steel may be used during processing. Open cut edges are not rust-resistant. If necessary, separate rust protection must be applied.

Even with stainless steel, flash rust may occur depending on the environmental conditions and should be removed immediately. The suitability of the material with regard to mechanical and chemical resistance must always be checked in individual cases. The suitability for use in terms of mechanical and chemical resistance must always be checked on a case-by-case basis.

## CARE

Stainless steel (304) does not require any special care. If necessary, it can be cleaned with clear, clean water and a few drops of washing-up liquid. Then wipe dry.

Avoid using acidic, alkaline and abrasive cleaning agents. Flash rust can be removed with commercially available polishes suitable for stainless steel.

Please note: For technical reasons, tolerances in color effects of the materials and print are possible.  
All information is based on the best of our knowledge and belief. No guarantee can be derived from this.  
We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



## PROCESSING

1. Mark the area where the film is to be placed.
2. Place the first template in the desired position on the floor. We recommend using two connected templates (tongue and groove) to start with.
3. Drill holes approx. 30 mm deep using a suitable 11 mm drill bit.
4. Remove the first template and reconnect it to the second template if necessary. Repeat the sequence if necessary.
5. Insert the studs into the holes and tap them in with a rubber mallet.

The generally accepted rules of technology and tiling must be observed. Suitability for use with mechanical and chemical resistance must always be checked in each individual case.

## TECHNICAL DIMENSIONS AND PRODUCT VARIANTS

Material	[TPU], [Stainless Steel (304)], [TPU]
Surface	[grooved]
Colour	black, grey
Height	5 mm
diameter	25 mm

## PRODUCT VARIANTS

Ident	Height	Surface	Colour
TNPEL 2533-5/250	5 mm	grooved	black
TNPL 2533-5/250	5 mm	grooved	black
TNPL 2538-5/250	5 mm	grooved	grey
TNPL 2532-5/250	5 mm		

Please note: For technical reasons, tolerances in color effects of the materials and print are possible.  
All information is based on the best of our knowledge and belief. No guarantee can be derived from this.  
We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.